

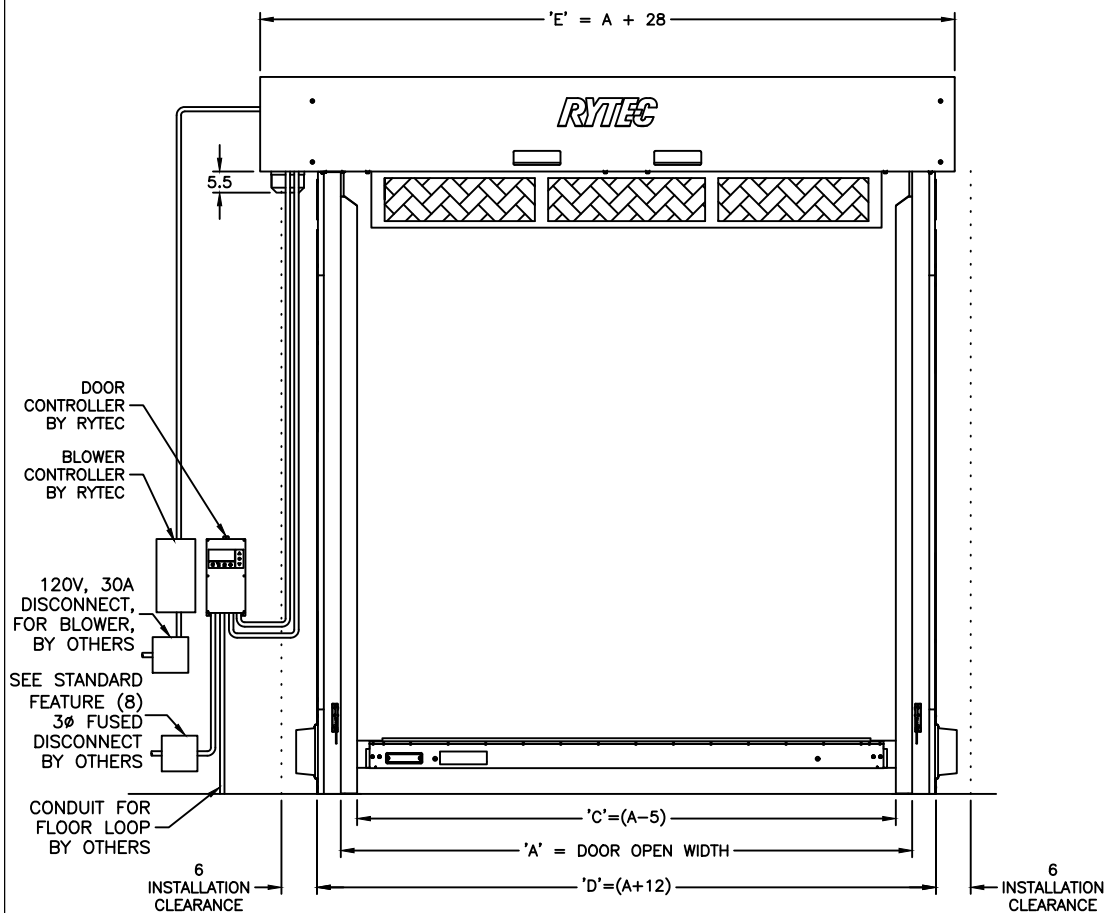


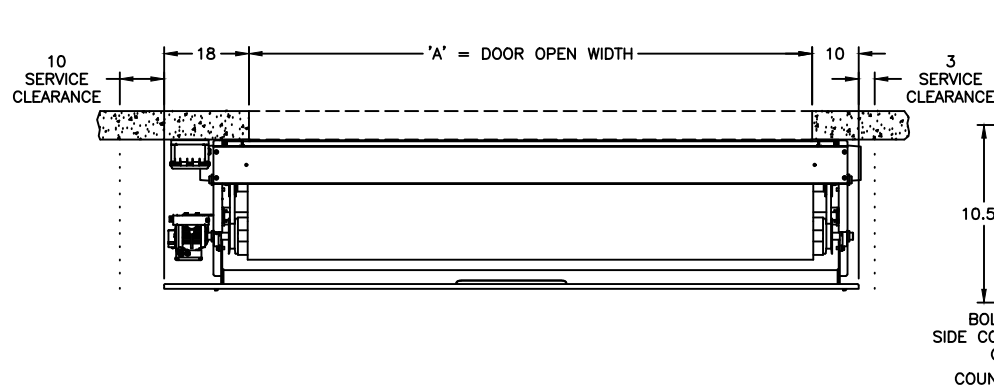

*IF DOOR IS MOUNTED ON A FREEZER TO COOLER OPENING, DOOR, CONTROL PANEL, AND BLOWERS MUST BE MOUNTED TO THE WARM SIDE OF THE OPENING.

		X1	X2
STANDARD	B ≤ 192.00	39.00	32.00
EXTRA TALL (XT)	B > 192.00	41.00	34.00

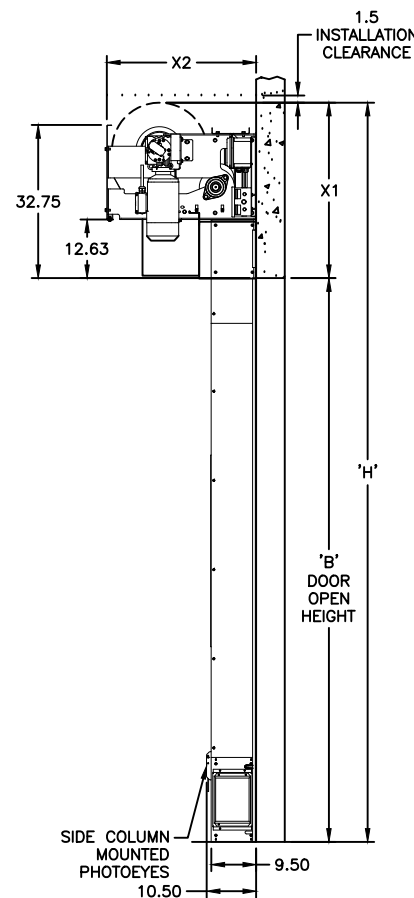

FINAL APPROVAL SIGNATURE	
FABRICATION CAN PROCEED ACCORDING TO THE SPECIFICATION SHOWN EXCEPT AS NOTED	
APPROVED BY:	_____
PRINT NAME:	_____
SIGNATURE:	_____
DATE:	_____

DRAWING NOT TO SCALE, ALL DIMENSIONS IN INCHES						
DOOR NO.	A	B	C	D	E	H
APPLICATION						
☐ COOLER TO COOLER ☐ COOLER TO FREEZER						
ELECTRICAL OPTIONS						
☐ 460v - 3ph ☐ 230v/208v - 3ph ☐ 480v OPEN DELTA, UNGROUNDED (\$)			☐ 575v - 3ph (\$) (INCLUDES NEMA 4 METAL ENCLOSURE WITH 575/460 TRANSFORMER)			
STANDARD FEATURES						
1. SYSTEM 4+ DRIVE AND CONTROL 2. INSULATED 1" THICK BLUE FOAM PANEL & FIBERGLASS THERMAL BREAKS AROUND DOOR PERIMETER 3. QUAD SEALING SIDE COLUMNS, DUAL HEAD SEALS 4. WIRELESS (NO COIL CORD) THERMALLY ISOLATED COMPOSITE BOTTOM BAR WITH DUAL AIR REVERSING EDGE 5. SELF RESETTING BREAKAWAY BOTTOM BAR. 6. FRONT AND REAR SAFETY PHOTO EYES 7. (2) SETS PATHWATCH SAFETY SYSTEM 8. "RAF" TWO SPEED UNHEATED BLOWER SYSTEM 9. 208, 230, & 460v REQUIRES 20 AMP SERVICE. 575V REQUIRES 15 AMP SERVICE 10. BLOWERS AND SIDE COLUMN HEATERS REQUIRE SEPARATE 120V, 30 AMP SERVICE -OR- SINGLE SOURCE TRANSFORMER OPTION.						
UPGRADE OPTIONS						
☐ RIGHT HAND MOTOR MOUNT (LH STANDARD) ☐ SINGLE SOURCE TRANSFORMER (\$) ☐ FLOOR MOUNTED SIDE COLUMN GUARD (\$) ☐ ROTARY DISCONNECT (NON-FUSED) (\$) ☐ BTA4 (BLUETOOTH ACCESS TERMINAL) (\$) NIGHT SWITCH FUNCTION: _____ ☐ SELECTOR SWITCH ON CONTROL BOX (\$) FUNCTION: _____ BLOWER STYLE: ☐ EZONE, SINGLE SPEED BLOWERS (\$)						
ACTIVATION OPTIONS (\$)						
☐ — PUSHBUTTON ☐ — PULL CORDS ☐ — MOTION DETECTOR ☐ — PRESENCE DET. ☐ — MOTION/PRESENCE			☐ DUAL LOOP CONTROLLER ☐ RADIO CONTROL RCVR (INCLUDE MIN 2 XMIT) — 1 BTN TRANSMITTER — 2 BTN TRANSMITTER — 4 BTN TRANSMITTER			
OPTION NOTES						
(\$) = PRICING CHANGE IF NOT INCLUDED IN QUOTE						
PLEASE SPECIFY VOLTAGE						
RYTEC CORPORATION						
ONE CEDAR PARKWAY, JACKSON, WI 53037-0403						
APPROVAL DRAWING TURBO-SEAL INSULATED GEN 2.0 WITH 2 SPEED BLOWER - SYSTEM 4+						
CUSTOMER: _____						
LOCATION: _____						
DATE: _____						REV.: A
DRAWING NO.: 2102-01T						