





DETAIL B

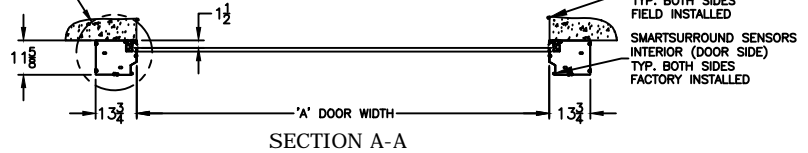


SECTION A-A

SMARTSURROUND SENSORS
EXTERIOR (NON-DOOR SIDE)
TYP. BOTH SIDES
FIELD INSTALLED

SMARTSURROUND SENSORS
INTERIOR (DOOR SIDE)
TYP. BOTH SIDES
FACTORY INSTALLED

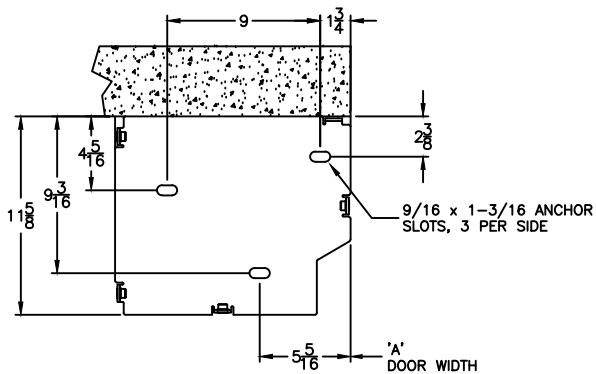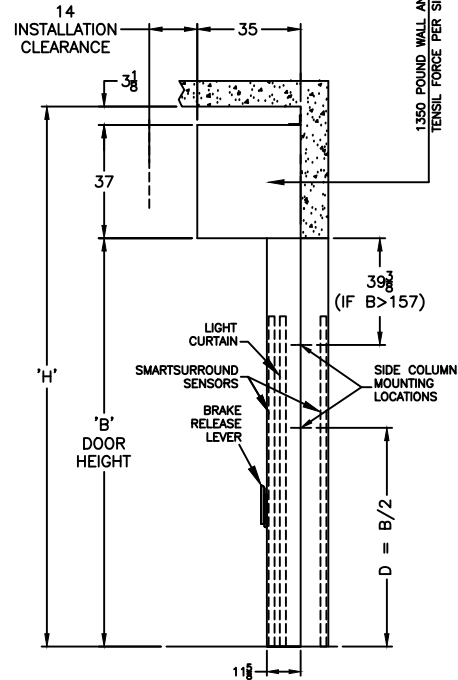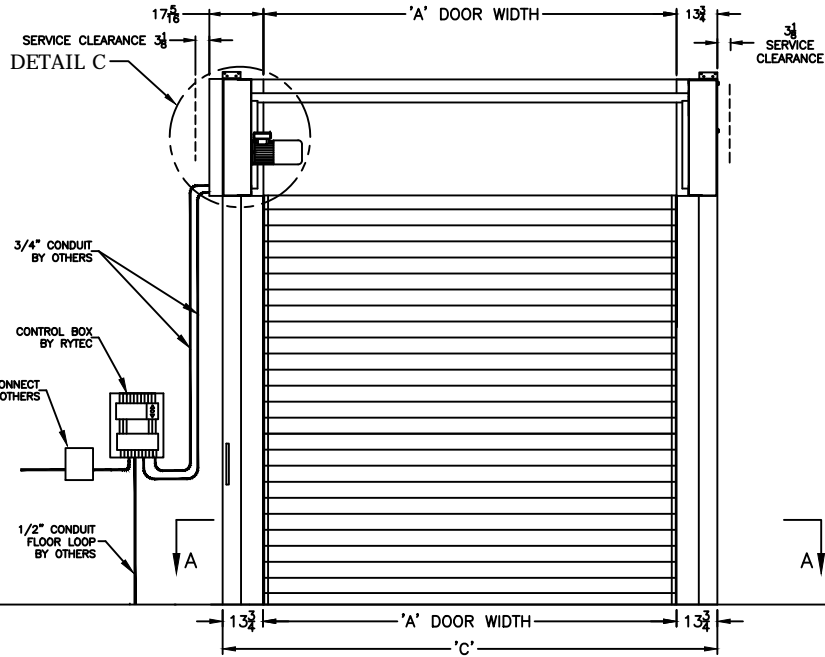

DETAIL B

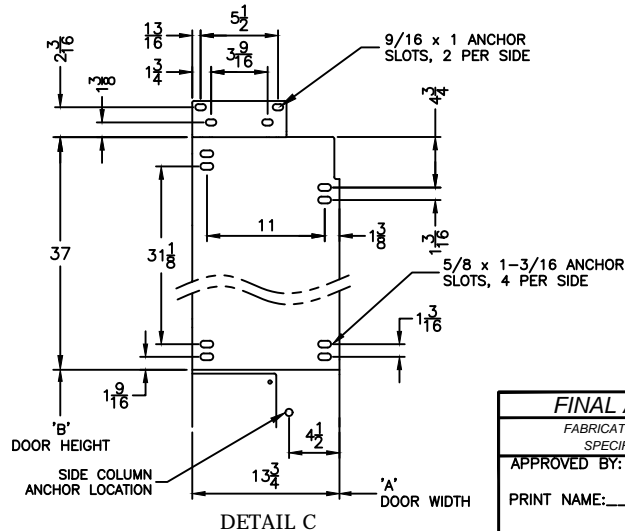

DETAIL C

DIMENSIONAL VARIABLES

DRAWING NOT TO SCALE; DIMENSIONS IN INCHES

DOOR NO.	A	B	C	H

MILLIMETERS

ACTUAL DOOR SIZE IS PRODUCED IN MILLIMETERS
REQUESTED DOOR SIZE IS CONVERTED TO MILLIMETERS
AND ROUNDED UP TO THE NEAREST 10MM

ELECTRICAL OPTIONS

- 460v - 3ph
- 230v/208v - 3ph
- 230v - 1ph
- 480v OPEN DELTA, UNGROUNDED (\$)
- 575v - 3ph (\$)
(INCLUDES NEMA 4 METAL ENCLOSURE WITH 575/460 TRANSFORMER)

STANDARD FEATURES

1. SIDE COLUMN AND HEAD CONSOLE POWDER COATED RYTEC SILVER.
2. INTELLIGENT LIGHT CURTAIN SYSTEM IN DOOR LINE TO 6'-0" ABOVE FINISHED FLOOR.
3. SMARTSURROUND ADVANCED DETECTION AND ALERT SYSTEM.
4. VARIABLE DOOR OPENING SPEED; UP TO 60"/SEC.
5. PROGRAMMABLE UPPER AND LOWER LIMITS.
6. NEMA 4X SYSTEM 4 CONTROL BOX (8.5"x16.5").
7. BRAKE RELEASE LEVER ON SIDE COLUMN.

UPGRADE OPTIONS

- BRAKE RELEASE LEVER:
- SIDE COLUMN (\$) REMOTE MOUNT (\$) BOTH (\$)
 - SLANT HOOD (INCLUDES FRONT/BOTTOM COVERS) (\$)
 - FLAT HOOD (INCLUDES FRONT/BOTTOM COVERS) (\$)
 - FRONT AND BOTTOM HEAD COVERS ONLY (\$)
 - RIGHT HAND DRIVE
 - ROTARY DISCONNECT (\$)
 - BTA4 (BLUETOOTH ACCESS TERMINAL) (\$)
 - SIDE COLUMN MOUNT: LH RH NONE-REMOTE
 - BTA4 NIGHT SWITCH (\$)
 - FUNCTION: _____
 - FULL HEIGHT ACTIVE REVERSING EDGE SENSOR (\$)

PANEL OPTIONS

- INSULATED SOLID SLATS (\$)
 - WINDOWS (\$)
 - 1 2 3 4 OTHER _____
 - VENTS (\$)
 - 1 2 3 4 OTHER _____
 - VISION HEIGHT (DIM 'J')
 - 33" 39" 51"
- UP TO FOUR (4) VISION/VENT SLATS PER GROUP WITH AT LEAST ONE (1) SOLID SLAT SEPARATING GROUPS.

ACTIVATION OPTIONS (\$)

- PUSHBUTTON
- PULL CORDS
- MOTION DETECTOR
- PRESENCE DET.
- MOTION/PRESENCE
- DUAL LOOP CONTROLLER
- RADIO CONTROL RCVR (INCLUDE MIN 2 XMIT)
- ___ 1 BTN TRANSMITTER
- ___ 2 BTN TRANSMITTER
- ___ 4 BTN TRANSMITTER

OPTION NOTES

(\$) = PRICING CHANGE IF NOT INCLUDED IN QUOTE

****PLEASE SPECIFY VOLTAGE****

RYTEC CORPORATION

ONE CEDAR PARKWAY, JACKSON, WI 53037-0403

APPROVAL DRAWING

SPIRAL MODEL SST-S/R

FOR DOOR WIDTH UP TO 20'-0", HEIGHT UP TO 21'-0"

CUSTOMER: _____

LOCATION: _____

DATE: _____ REV.: _____

DRAWING NO.: _____

FINAL APPROVAL SIGNATURE

FABRICATION CAN PROCEED ACCORDING TO THE SPECIFICATION SHOWN EXCEPT AS NOTED.

APPROVED BY: _____

PRINT NAME: _____

SIGNATURE: _____

DATE: _____

REV	DESCRIPTION	DATE	BY