


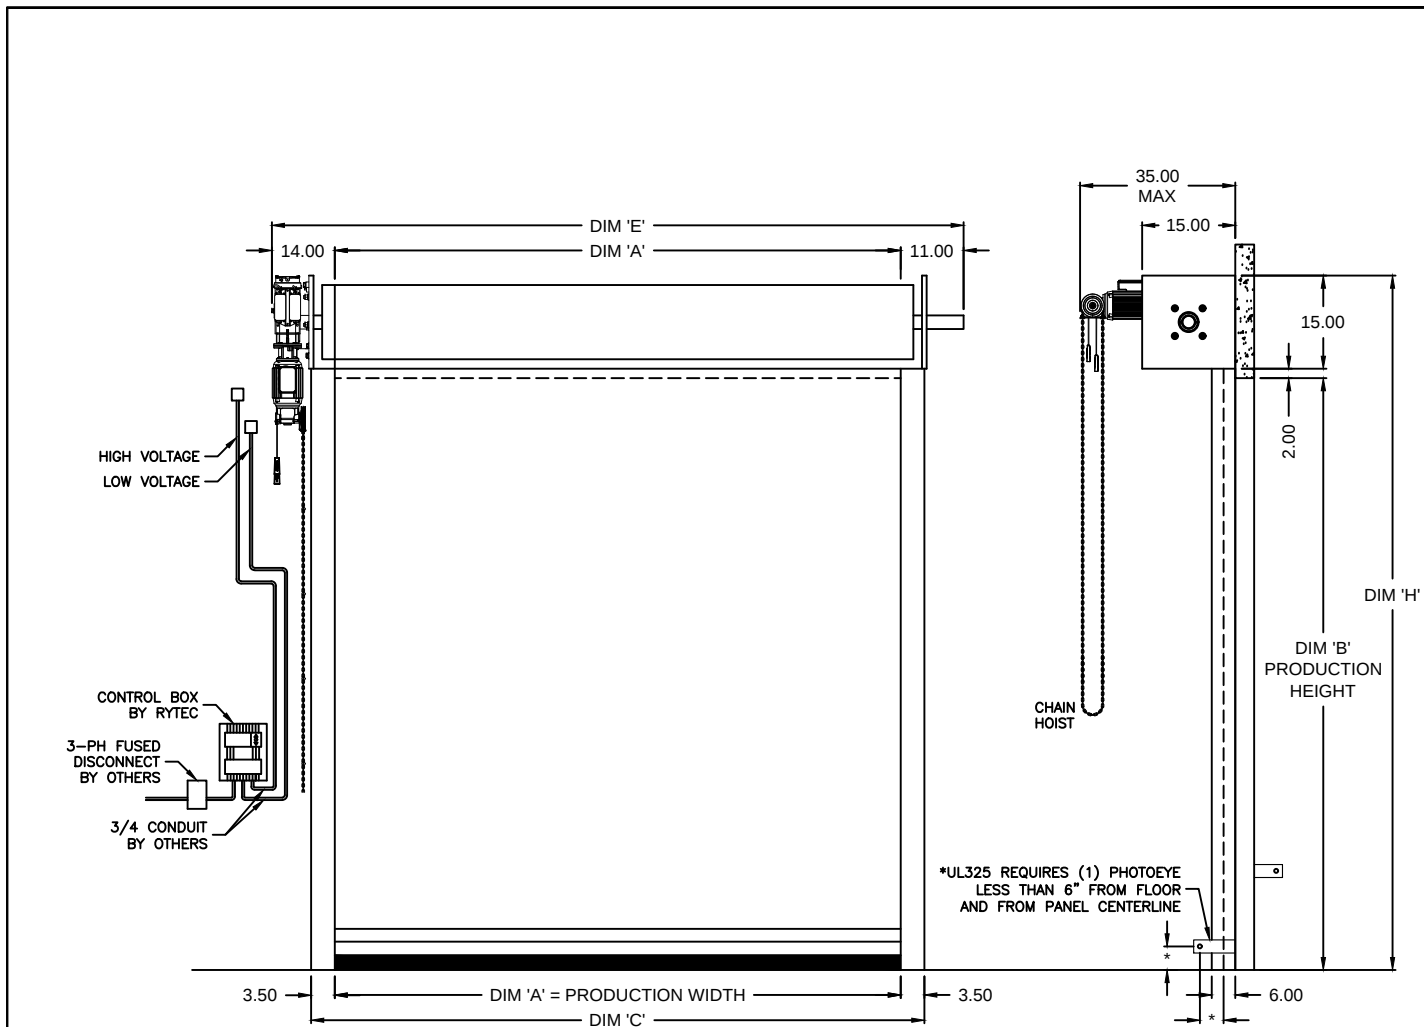

HEAD PLATE SIZING = 'P' (INCHES)	
DOOR PRODUCTION WIDTH = 'A' (FT)	
	8-12
8	15
9	
10	
11	
12	

FINAL APPROVAL SIGNATURE	
FABRICATION CAN PROCEED ACCORDING TO THE SPECIFICATION SHOWN EXCEPT AS NOTED	
APPROVED BY:	
PRINT NAME:	
SIGNATURE:	
DATE:	

DRAWING NOT TO SCALE, ALL DIMENSIONS IN INCHES					
DOOR NO.	A	B	C	E	H
PANEL OPTIONS ☐ 1/4" SBR RUBBER - BLACK ☐ 1/4" EPDM RUBBER - BLUE (\$) ☐ 1/4" EPDM RUBBER - GRAY (\$)					
ELECTRICAL OPTIONS ☐ 460v - 3ph ☐ *230v - 3ph (\$) ☐ 480v OPEN DELTA, ☐ *575v - 3ph (\$) UNGROUNDED (\$) *(INCLUDES NEMA 4 METAL ENCLOSURE WITH 575/460 OR 230/460 TRANSFORMER)					
STANDARD FEATURES 1. RUBBER SEAL, NO SENSOR, WILL REQUIRE CONSTANT PRESSURE OPEN/CLOSE OPERATION 2. SEMI-AUTOMATIC SELF REPAIRING BOTTOM BAR 3. (2) SAFETY PHOTOEYES (FIELD INSTALLED) LOCATE 2ND PE ACCORDING TO APP NEEDS 4. CHAIN HOIST (IN CASE OF POWER FAILURE)					
UPGRADE OPTIONS ☐ FLAT HOOD (\$) ☐ MOTOR COVER (\$) ☐ RIGHT HAND DRIVE ☐ WINDLOAD PACKAGE (\$) ☐ ELECTRIC REVERSING EDGE (\$) ☐ PATHWATCH SAFETY LIGHT SYSTEM (\$) (2) LED STRIPS, FIELD INSTALLED ☐ ROTARY DISCONNECT (NOT FUSED) (\$) ☐ BTA4 (BLUETOOTH ACCESS TERMINAL) (\$) NIGHT SWITCH FUNCTION: _____ ☐ SELECTOR SWITCH ON CONTROL BOX (\$) FUNCTION: _____					
ACTIVATION OPTIONS (\$) **ANY AUTO ACTIVATION REQUIRES ELECTRIC REVERSING EDGE ☐ — PUSHBUTTON ☐ DUAL LOOP CONTROLLER ☐ — O/C/S STATION ☐ RADIO CONTROL RCVR (INCLUDE MIN 2 XMIT) ☐ — MOTION DETECTOR — 1 BTN TRANSMITTER ☐ — PRESENCE DET. — 2 BTN TRANSMITTER ☐ — MOTION/PRESENCE — 4 BTN TRANSMITTER					
OPTION NOTES (\$) = PRICING CHANGE IF NOT INCLUDED IN QUOTE ***PLEASE SPECIFY VOLTAGE***					
RYTEC CORPORATION ONE CEDAR PARKWAY, JACKSON, WI 53037-0403					
APPROVAL DRAWING POWERTEC SD (DD) - SYSTEM 4					
CUSTOMER:					
LOCATION:					
DATE:					REV.: —
DRAWING NO.: 6113-00T					