


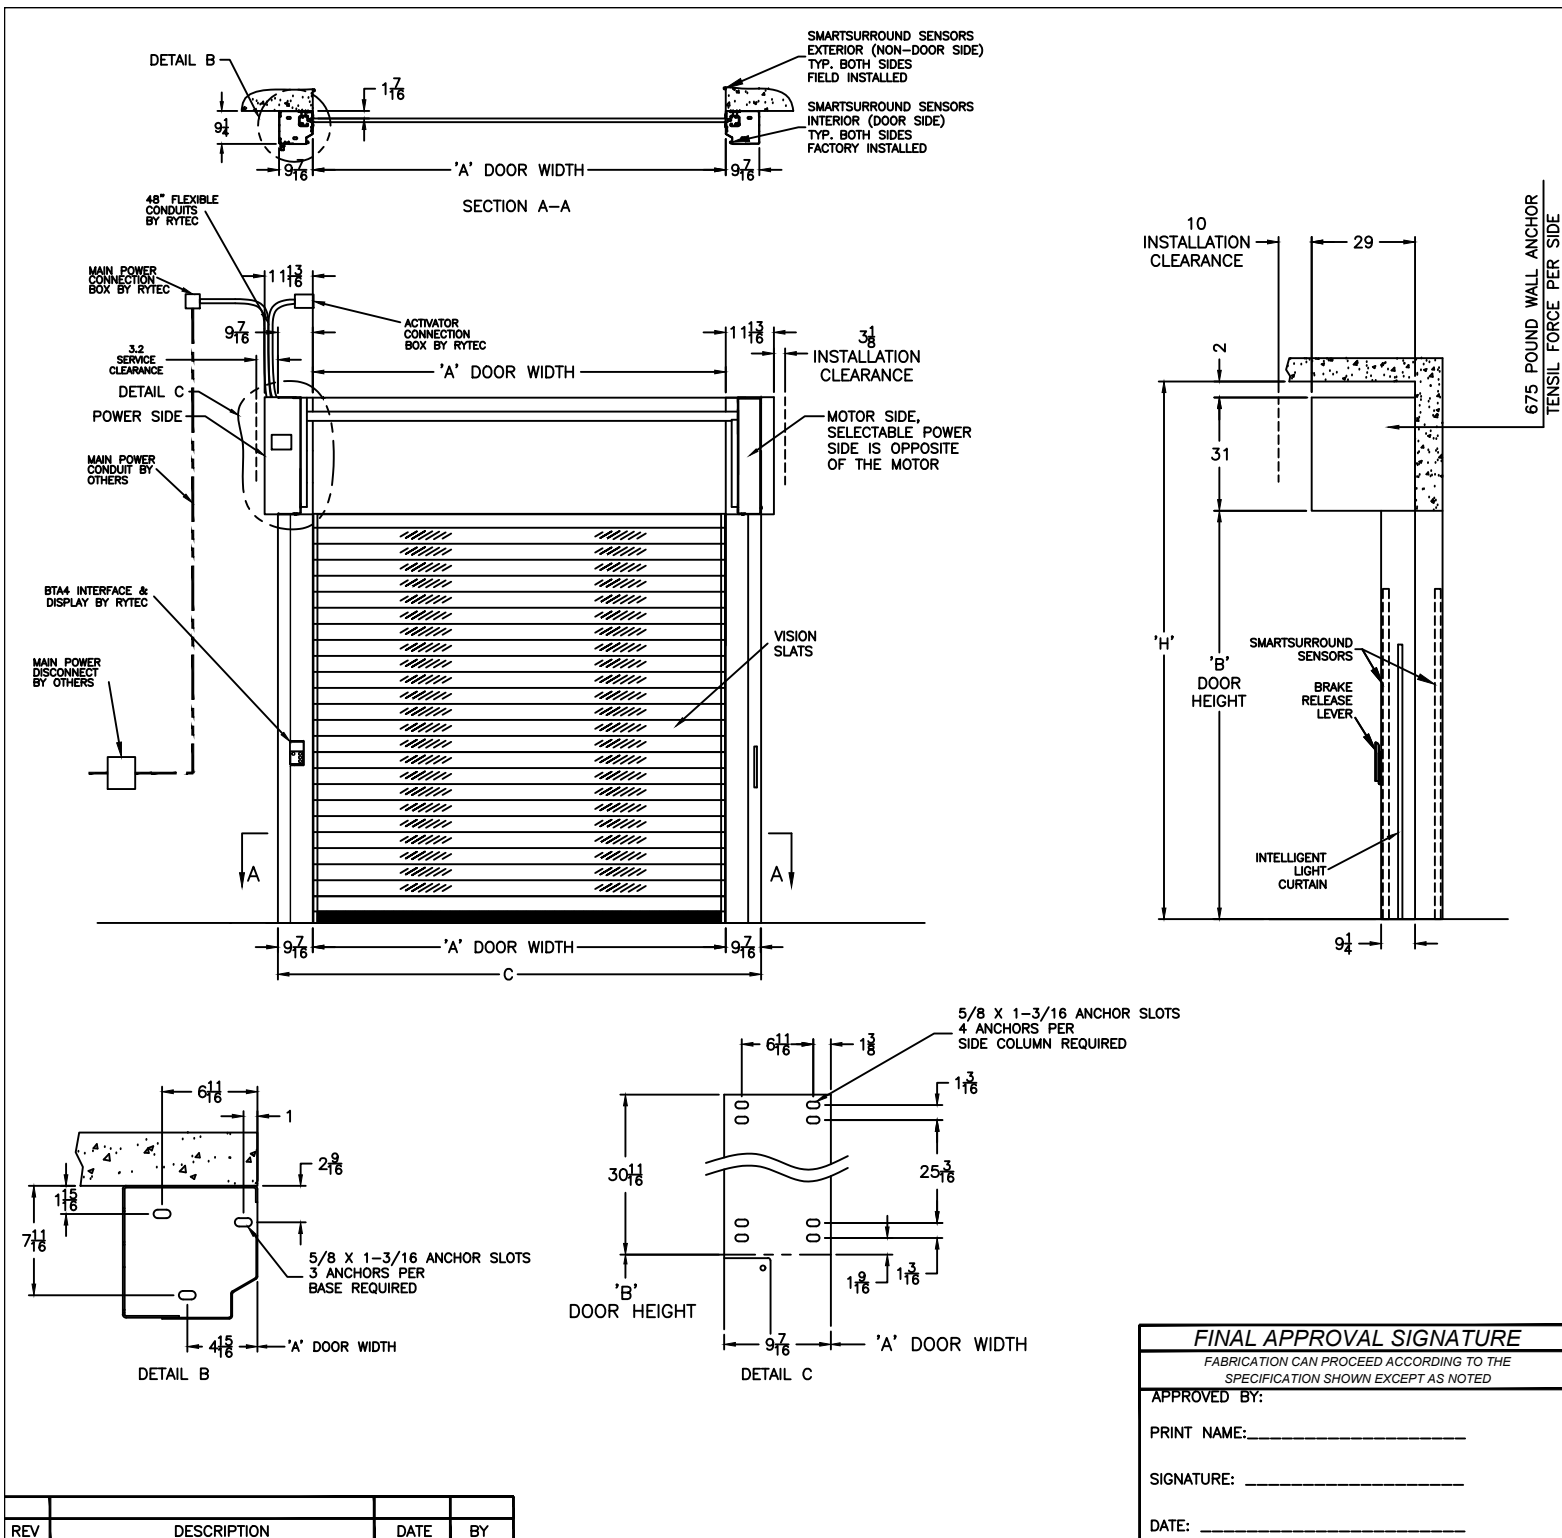

DIMENSIONAL VARIABLES				
DRAWING NOT TO SCALE: DIMENSIONS IN INCHES				
DOOR NO.	A	B	C	H
MILLIMETERS				
ACTUAL DOOR SIZE IS PRODUCED IN MILLIMETERS REQUESTED DOOR SIZE IS CONVERTED TO MILLIMETERS AND ROUNDED UP TO THE NEAREST 10MM				
ELECTRICAL OPTIONS				
☐ 460v - 3ph ☐ 230v/208v - 3ph ☐ 230v - 1ph		☐ FUSED DISCONNECT (\$) ☐ 480v OPEN DELTA, UNGROUNDED (\$)		
STANDARD FEATURES				
1. SIDE COLUMN AND HEAD CONSOLE POWDER COATED RYTEC SILVER. 2. INTELLIGENT LIGHT CURTAIN SYSTEM IN DOOR LINE TO 6'-0" ABOVE FINISHED FLOOR. 3. SMARTSURROUND ADVANCED DETECTION AND ALERT SYSTEM. 4. VARIABLE DOOR OPENING SPEED; UP TO 100"/SEC. 5. PROGRAMMABLE UPPER AND LOWER LIMITS. 6. SYSTEM 4+ DRIVE AND CONTROL. 7. BRAKE RELEASE LEVER ON SIDE COLUMN. 8. PREMIUM PRE-WIRED PACKAGES. 9. SELECTABLE POWER SIDE ALWAYS OPP OF MOTOR				
UPGRADE OPTIONS				
BRAKE RELEASE LEVER ☒ SIDE COLUMN ☐ REMOTE MOUNT (\$) ☐ BOTH (\$) ☐ SLANT HOOD (INCLUDES FRONT/BOTTOM COVERS) (\$) ☐ FLAT HOOD (INCLUDES FRONT/BOTTOM COVERS) (\$) ☐ FRONT AND BOTTOM HEAD COVERS ONLY (\$) ☐ RIGHT HAND POWER/LEFT HAND MOTOR ☒ BTA4 (BLUETOOTH ACCESS TERMINAL) SIDE COLUMN MOUNT: ☒ LH ☐ RH ☐ NONE-REMOTE ☒ BTA4 NIGHT SWITCH FUNCTION: <u>ADVISE FUNCTION</u> ☐ FULL HEIGHT ACTIVE REVERSING EDGE SENSOR (\$)				
ACTIVATION OPTIONS (\$)				
☐ — PUSHBUTTON ☐ — PULL CORDS ☐ — MOTION DETECTOR ☐ — PRESENCE DET. ☐ — MOTION/PRESENCE		☐ DUAL LOOP CONTROLLER		
OPTION NOTES				
(\$) = PRICING CHANGE IF NOT INCLUDED IN QUOTE				
****PLEASE SPECIFY VOLTAGE AND NIGHT SWITCH FUNCTION***				
****PLEASE CONFIRM POWER SIDE***				
RYTEC CORPORATION				
ONE CEDAR PARKWAY, JACKSON, WI 53037-0403				
APPROVAL DRAWING				
SPIRAL FV MODEL STT-L WITH PRE-WIRED PACKAGE FOR DOOR WIDTH UP TO 13'-1", HEIGHT UP TO 12'-9"				
CUSTOMER:				
LOCATION:				
DATE:				REV.: B
DRAWING NO.: 724-01T-PREWIRED				