


DETAIL B





SECTION A-A

SMARTSURROUND SENSORS  
EXTERIOR (NON-DOOR SIDE)  
TYP. BOTH SIDES  
FIELD INSTALLED

SMARTSURROUND SENSORS  
INTERIOR (DOOR SIDE)  
TYP. BOTH SIDES  
FACTORY INSTALLED

'A' DOOR WIDTH

13 3/4

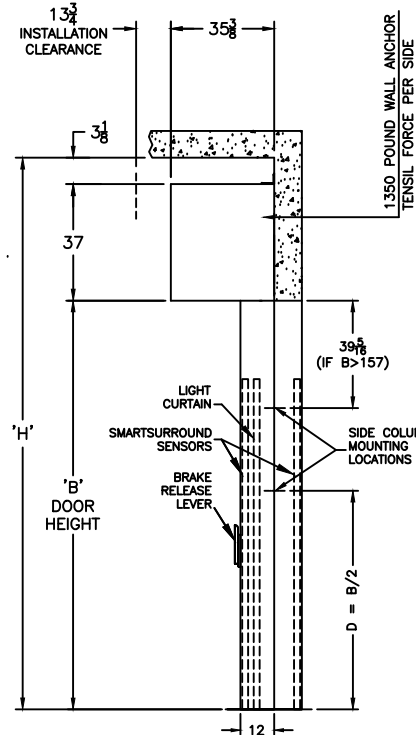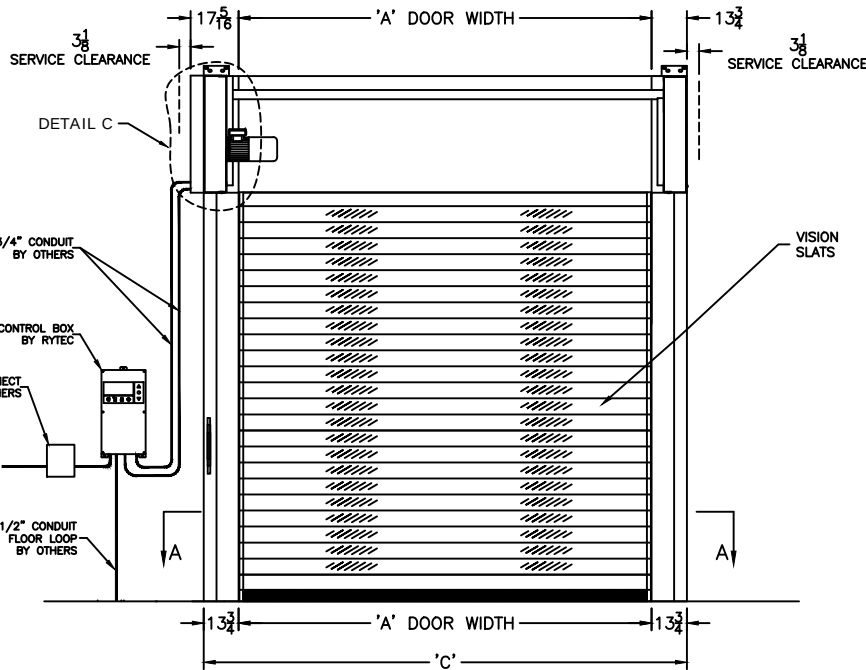

## DIMENSIONAL VARIABLES

DRAWING NOT TO SCALE; DIMENSIONS IN INCHES

| DOOR NO.    | A | B | C | H |
|-------------|---|---|---|---|
|             |   |   |   |   |
| MILLIMETERS |   |   |   |   |

ACTUAL DOOR SIZE IS PRODUCED IN MILLIMETERS  
REQUESTED DOOR SIZE IS CONVERTED TO MILLIMETERS  
AND ROUNDED UP TO THE NEAREST 10MM

## ELECTRICAL OPTIONS

- ☐ 460v - 3ph  
☐ 230v/208v - 3ph  
☐ 230v - 1ph  
☐ 480v OPEN DELTA, UNGROUNDED (\$)
- ☐ 575v - 3ph (\$)  
(INCLUDES NEMA 4 METAL ENCLOSURE WITH 575/460 TRANSFORMER)

## STANDARD FEATURES

- SIDE COLUMN AND HEAD CONSOLE POWDER COATED RYTEC SILVER.
- INTELLIGENT LIGHT CURTAIN SYSTEM IN DOOR LINE TO 6'-0" ABOVE FINISHED FLOOR.
- SMARTSURROUND ADVANCED DETECTION AND ALERT SYSTEM.
- VARIABLE DOOR OPENING SPEED; UP TO 100"/SEC.
- PROGRAMMABLE UPPER AND LOWER LIMITS.
- SYSTEM 4+ DRIVE AND CONTROL.
- BRAKE RELEASE LEVER ON SIDE COLUMN.

## UPGRADE OPTIONS

- ☒ BRAKE RELEASE LEVER
- ☒ SIDE COLUMN ☐ REMOTE MOUNT (\$) ☐ BOTH (\$)
- ☐ SLANT HOOD (INCLUDES FRONT/BOTTOM COVERS) (\$)
- ☐ FLAT HOOD (INCLUDES FRONT/BOTTOM COVERS) (\$)
- ☐ FRONT AND BOTTOM HEAD COVERS (\$)
- ☐ RIGHT HAND DRIVE
- ☐ ROTARY DISCONNECT (\$)
- ☐ BT44 (BLUETOOTH ACCESS TERMINAL) (\$)
- SIDE COLUMN MOUNT: ☐ LH ☐ RH ☐ NONE-REMOTE
- ☐ BT44 NIGHT SWITCH (\$)
- FUNCTION: \_\_\_\_\_
- ☐ SELECTOR SWITCH ON CONTROL BOX (\$)
- FUNCTION: \_\_\_\_\_
- ☐ FULL VENTILATED SLATS (\$)
- ☐ FULL HEIGHT ACTIVE REVERSING EDGE SENSOR (\$)

## ACTIVATION OPTIONS (\$)

- ☐ PUSHBUTTON ☐ DUAL LOOP CONTROLLER
- ☐ PULL CORDS ☐ RADIO CONTROL RCVR
- ☐ MOTION DETECTOR (INCLUDE MIN 2 XMIT)
- ☐ PRESENCE DET. ☐ 1 BTN TRANSMITTER
- ☐ MOTION/PRESENCE ☐ 2 BTN TRANSMITTER
- ☐ 4 BTN TRANSMITTER

## OPTION NOTES

(\$ ) = PRICING CHANGE IF NOT INCLUDED IN QUOTE

\*\*\*PLEASE SPECIFY VOLTAGE\*\*\*

## RYTEC CORPORATION

ONE CEDAR PARKWAY, JACKSON, WI 53037-0403

## APPROVAL DRAWING

## SPIRAL FV MODEL STT-S

FOR DOOR WIDTH UP TO 20', HEIGHT UP TO 19'-8"

CUSTOMER: \_\_\_\_\_

LOCATION: \_\_\_\_\_

DATE: \_\_\_\_\_

DRAWING NO.: 729-01T

## FINAL APPROVAL SIGNATURE


FABRICATION CAN PROCEED ACCORDING TO THE SPECIFICATION SHOWN EXCEPT AS NOTED

APPROVED BY: \_\_\_\_\_

PRINT NAME: \_\_\_\_\_

SIGNATURE: \_\_\_\_\_

DATE: \_\_\_\_\_

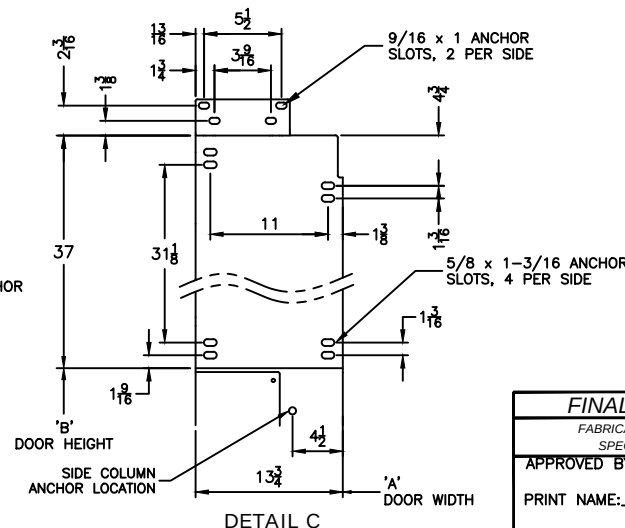

DETAIL C

DETAIL B

| REV | DESCRIPTION | DATE | BY |
|-----|-------------|------|----|
|     |             |      |    |