

DIMENSIONAL VARIABLES

DRAWING NOT TO SCALE; DIMENSIONS IN INCHES

DOOR NO.	A	B	C	F	M	K1	K	H
MILLIMETERS								

ACTUAL DOOR SIZE IS PRODUCED IN MILLIMETERS
REQUESTED DOOR SIZE IS CONVERTED TO MILLIMETERS
AND ROUNDED UP TO THE NEAREST 10MM

ELECTRICAL OPTIONS

- | | |
|---|---|
| ☐ 460v - 3ph
☐ 230v/208v - 3ph
☐ 230v - 1ph
☐ 480v OPEN DELTA, UNGROUNDED (\$) | ☐ 575v - 3ph (\$) (INCLUDES NEMA 4 METAL ENCLOSURE WITH 575/460 TRANSFORMER) |
|---|---|

STANDARD FEATURES

- SIDE COLUMN AND HEAD CONSOLE POWDER COATED RYTEC SILVER.
- INTELLIGENT LIGHT CURTAIN SYSTEM IN DOOR LINE TO 6'-0" ABOVE FINISHED FLOOR.
- SMARTSURROUND ADVANCED DETECTION AND ALERT SYSTEM.
- VARIABLE DOOR OPENING SPEED; UP TO 80"/SEC.
- PROGRAMMABLE UPPER AND LOWER LIMITS.
- NEMA 4X SYSTEM 4 CONTROL BOX (8.5"x16.5").
- BRAKE RELEASE LEVER ON SIDE COLUMN.

UPGRADE OPTIONS

- BRAKE RELEASE LEVER**
- ☒ SIDE COLUMN ☐ REMOTE MOUNT (\$) ☐ BOTH (\$)
- ☐ RIGHT HAND DRIVE
☐ ROTARY DISCONNECT (\$)
- ☐ BT4 (BLUETOOTH ACCESS TERMINAL) (\$)
- SIDE COLUMN MOUNT: ☐ LH ☐ RH ☐ NONE-REMOTE
- ☐ BT4 NIGHT SWITCH (\$)
- FUNCTION: _____
- ☐ SELECTOR SWITCH ON CONTROL BOX (\$)
- FUNCTION: _____
- ☐ PHOTOEYES IN LIEU OF LIGHT CURTAINS (\$)

ACTIVATION OPTIONS (\$)

- | | |
|--|---|
| ☐ — PUSHBUTTON
☐ — PULL CORDS
☐ — MOTION DETECTOR
☐ — PRESENCE DET.
☐ — MOTION/PRESENCE | ☐ DUAL LOOP CONTROLLER
☐ RADIO CONTROL RCVR (INCLUDE MIN 2 XMIT)
☐ — 1 BTN TRANSMITTER
☐ — 2 BTN TRANSMITTER
☐ — 4 BTN TRANSMITTER |
|--|---|

OPTION NOTES

(\$) = PRICING CHANGE IF NOT INCLUDED IN QUOTE

— FULL VENTILATED PANEL ASSEMBLY

PLEASE SPECIFY VOLTAGE

RYTEC CORPORATION

ONE CEDAR PARKWAY, JACKSON, WI 53037-0403

APPROVAL DRAWING

SPIRAL LH-FULL VENTILATED, STN-S
FOR DOOR WIDTH UP TO 18'-0", HEIGHT UP TO 16'-4"





CUSTOMER: _____

LOCATION: _____


DATE: _____

DRAWING NO.: 716-02T

REV.: B

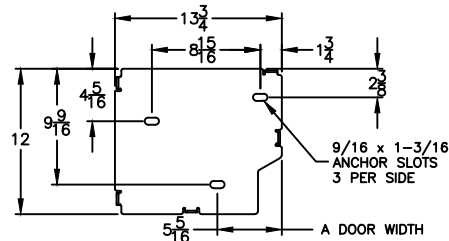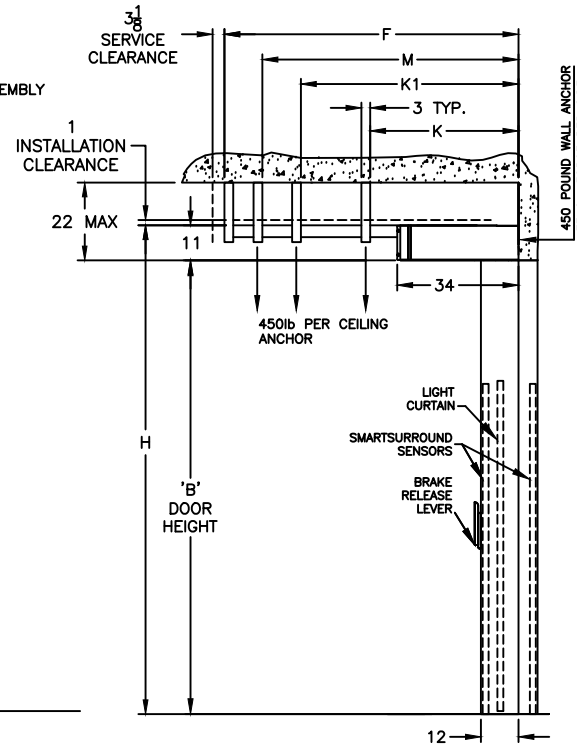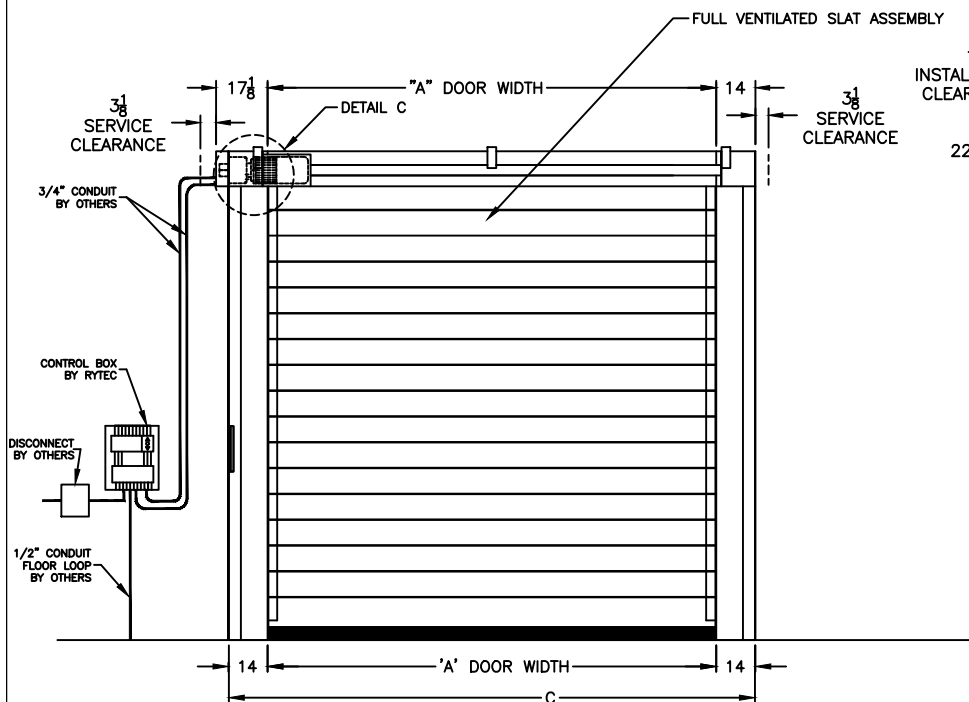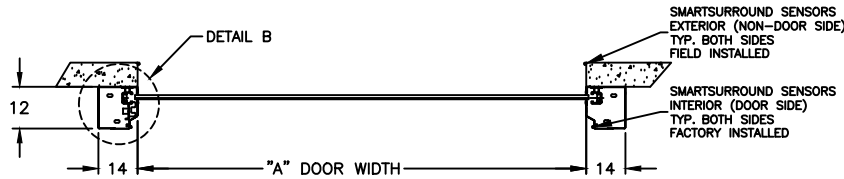

DETAIL B

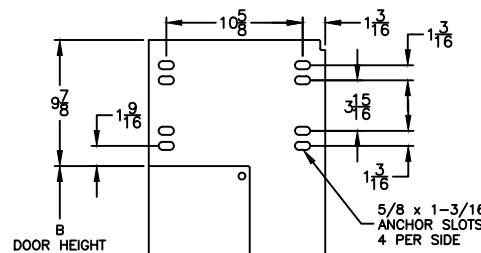

DETAIL C

HANGER FORMULAS

- K = NOT REQUIRED; FOR B<98
 K = 72; FOR B>=98
- K1 = NOT REQUIRED; FOR B<161
 K1 = 135; FOR B>=161
- M = B+20; FOR B<91
 M = B; FOR B>=91
- F = B+31; FOR B<91
 F = B+11; FOR B>=91

FINAL APPROVAL SIGNATURE

FABRICATION CAN PROCEED ACCORDING TO THE SPECIFICATION SHOWN EXCEPT AS NOTED

APPROVED BY: _____

PRINT NAME: _____

SIGNATURE: _____

DATE: _____

REV	DESCRIPTION	DATE	BY