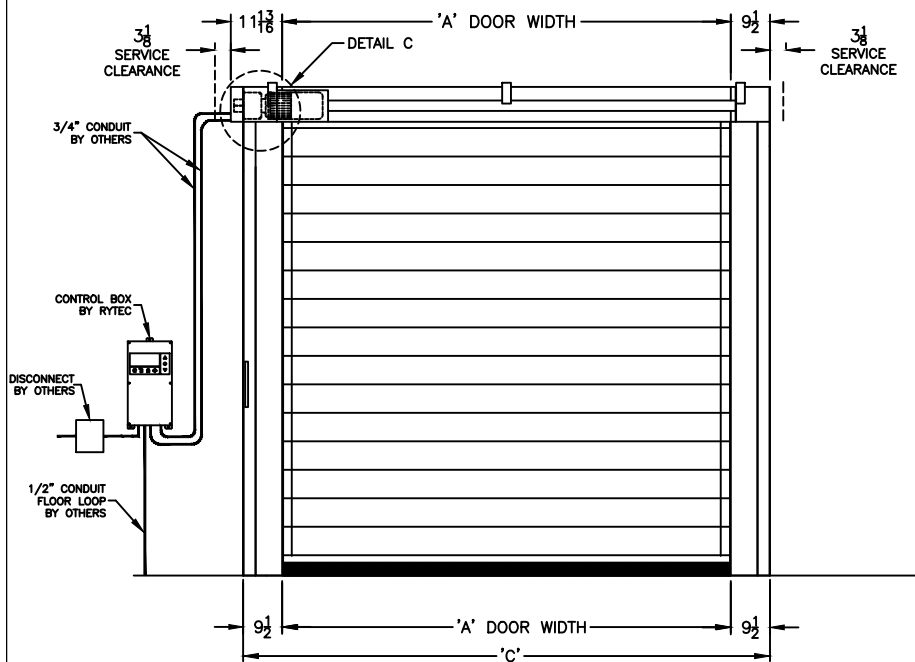
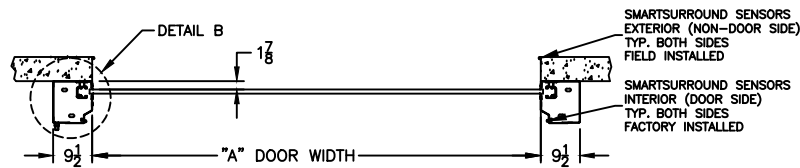


DIMENSIONAL VARIABLES

DRAWING NOT TO SCALE; DIMENSIONS IN INCHES

DOOR NO.	A	B	C	F	M	K	H
MILLIMETERS							

ACTUAL DOOR SIZE IS PRODUCED IN MILLIMETERS
REQUESTED DOOR SIZE IS CONVERTED TO MILLIMETERS
AND ROUNDED UP TO THE NEAREST 10MM

ELECTRICAL OPTIONS

- | | |
|---|---|
| ☐ 460v - 3ph
☐ 230v/208v - 3ph
☐ 230v - 1ph
☐ 480v OPEN DELTA, UNGROUNDED (\$) | ☐ 575v - 3ph (\$) (INCLUDES NEMA 4 METAL ENCLOSURE WITH 575/460 TRANSFORMER) |
|---|---|

STANDARD FEATURES

- SIDE COLUMN AND HEAD CONSOLE POWDER COATED RYTEC SILVER.
- INTELLIGENT LIGHT CURTAIN SYSTEM IN DOOR LINE TO 6'-0" ABOVE FINISHED FLOOR.
- SMARTSURROUND ADVANCED DETECTION AND ALERT SYSTEM.
- VARIABLE DOOR OPENING SPEED; UP TO 60"/SEC.
- PROGRAMMABLE UPPER AND LOWER LIMITS.
- SYSTEM 4+ DRIVE AND CONTROL.
- BRAKE RELEASE LEVER ON SIDE COLUMN.

UPGRADE OPTIONS

- BRAKE RELEASE LEVER
- ☒ SIDE COLUMN ☐ REMOTE MOUNT (\$) ☐ BOTH (\$)
- ☐ RIGHT HAND DRIVE
- ☐ ROTARY DISCONNECT (\$)
- ☐ BT44 (BLUETOOTH ACCESS TERMINAL) (\$)
- SIDE COLUMN MOUNT: ☐ LH ☐ RH ☐ NONE-REMOTE
- ☐ BT44 NIGHT SWITCH (\$)
- FUNCTION: _____
- ☐ SELECTOR SWITCH ON CONTROL BOX (\$)
- FUNCTION: _____
- ☐ FULL HEIGHT ACTIVE REVERSING EDGE SENSOR (\$)

PANEL OPTIONS

- ☐ INSULATED SOLID SLATS (\$)
- WINDOWS (\$)
- ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ OTHER _____
- VENTS (\$)
- ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ OTHER _____
- VISION HEIGHT (DIM 'J')
- ☐ 33" ☐ 39" ☐ 51"
- UP TO FOUR (4) VISION/VENT SLATS PER GROUP WITH AT LEAST ONE (1) SOLID SLAT SEPARATING GROUPS.
- OR UP TO SEVEN (7) VISION/VENT SLATS PER GROUP W/ AT LEAST TWO (2) SOLID SLATS SEPARATING GROUPS.

ACTIVATION OPTIONS (\$)

- | | |
|--|---|
| ☐ PUSHBUTTON
☐ PULL CORDS
☐ MOTION DETECTOR
☐ PRESENCE DET.
☐ MOTION/PRESENCE | ☐ DUAL LOOP CONTROLLER
☐ RADIO CONTROL RCVR (INCLUDE MIN 2 XMIT)
☐ 1 BTN TRANSMITTER
☐ 2 BTN TRANSMITTER
☐ 4 BTN TRANSMITTER |
|--|---|

OPTION NOTES

(\$) = PRICING CHANGE IF NOT INCLUDED IN QUOTE

PLEASE SPECIFY VOLTAGE

RYTEC CORPORATION

ONE CEDAR PARKWAY, JACKSON, WI 53037-0403

APPROVAL DRAWING

SPIRAL LH MODEL SSN-L

FOR DOOR WIDTH UP TO 13'-1", HEIGHT UP TO 13'-1"

CUSTOMER: _____

LOCATION: _____

DATE: _____

DRAWING NO.: 725-01T

REV.: B

FORMULAS

$$F = (B + 30.50); \text{ FOR } B < 91$$

$$F = (B + 11.00); \text{ FOR } B \geq 91$$

$$M = (B + 20.00); \text{ FOR } B < 91$$

$$M = B; \text{ FOR } B \geq 91$$

$$K = \text{NOT REQ'D}; \text{ FOR } B < 99$$

$$K = 72.00; \text{ FOR } B \geq 99$$

FINAL APPROVAL SIGNATURE

FABRICATION CAN PROCEED ACCORDING TO THE SPECIFICATION SHOWN EXCEPT AS NOTED

APPROVED BY: _____

PRINT NAME: _____

SIGNATURE: _____

DATE: _____

REV	DESCRIPTION	DATE	BY