

DIMENSIONAL VARIABLES

DRAWING NOT TO SCALE; DIMENSIONS IN INCHES

DOOR NO.	A	B	C	F	M	K	H
1 DOOR							
MILLIMETERS							

ACTUAL DOOR SIZE IS PRODUCED IN MILLIMETERS
REQUESTED DOOR SIZE IS CONVERTED TO MILLIMETERS
AND ROUNDED UP TO THE NEAREST 10MM

ELECTRICAL OPTIONS

- | | |
|---|---|
| ☐ 460v - 3ph
☐ 230v/208v - 3ph
☐ 230v - 1ph
☐ 480v OPEN DELTA, UNGROUNDED (\$) | ☐ 575v - 3ph (\$) (INCLUDES NEMA 4 METAL ENCLOSURE WITH 575/460 TRANSFORMER) |
|---|---|

STANDARD FEATURES

- SIDE COLUMN AND HEAD CONSOLE POWDER COATED RYTEC SILVER.
- INTELLIGENT LIGHT CURTAIN SYSTEM IN DOOR LINE TO 6'-0" ABOVE FINISHED FLOOR.
- SMARTSURROUND ADVANCED DETECTION AND ALERT SYSTEM.
- VARIABLE DOOR OPENING SPEED; UP TO 24"/SEC.
- PROGRAMMABLE UPPER AND LOWER LIMITS.
- SYSTEM 4+ DRIVE AND CONTROL.
- BRAKE RELEASE LEVER ON SIDE COLUMN.

UPGRADE OPTIONS

- | | |
|--|--|
| ☐ RIGHT HAND DRIVE
☐ ROTARY DISCONNECT (\$) | ☐ BTA4 (BLUETOOTH ACCESS TERMINAL) (\$) |
| NIGHT SWITCH FUNCTION: _____
☐ SELECTOR SWITCH ON CONTROL BOX (\$) | |
| FUNCTION: _____
☐ FULL HEIGHT ACTIVE REVERSING EDGE SENSOR (\$) | |

PANEL OPTIONS

- | | |
|--|---|
| ☐ INSULATED SOLID SLATS (\$) | WINDOWS (\$) |
| ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ OTHER _____ | VENTS (\$) |
| ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ OTHER _____ | VISION HEIGHT (DIM 'J') |
| ☐ 33" ☐ 39" ☐ 51" | UP TO FOUR (4) VISION/VENT SLATS PER GROUP WITH AT LEAST ONE (1) SOLID SLAT SEPARATING GROUPS.
OR UP TO SEVEN (7) VISION/VENT SLATS PER GROUP W/ AT LEAST TWO (2) SOLID SLATS SEPARATING GROUPS. |

ACTIVATION OPTIONS (\$)

- | | |
|--|--|
| ☐ PUSHBUTTON
☐ PULL CORDS
☐ MOTION DETECTOR
☐ PRESENCE DET.
☐ MOTION/PRESENCE | ☐ DUAL LOOP CONTROLLER
☐ RADIO CONTROL RCVR (INCLUDE MIN 2 XMIT)
— 1 BTN TRANSMITTER
— 2 BTN TRANSMITTER
— 4 BTN TRANSMITTER |
|--|--|

OPTION NOTES

(\$) = PRICING CHANGE IF NOT INCLUDED IN QUOTE

PLEASE SPECIFY VOLTAGE

RYTEC CORPORATION

ONE CEDAR PARKWAY, JACKSON, WI 53037-0403

APPROVAL DRAWING

SPIRAL LP MODEL SSN-LP-S






DOOR WIDTHS 13'-2" TO 20'-0", HEIGHT UP TO 12'-0"

CUSTOMER: _____

LOCATION: _____

DATE: _____

DRAWING NO.: 732-01T REV.: A

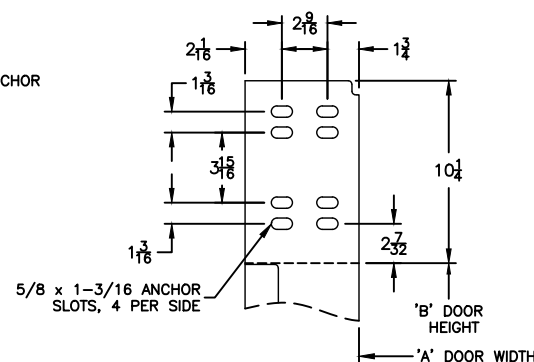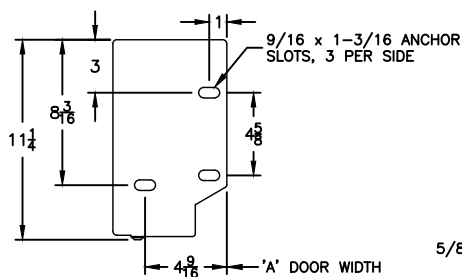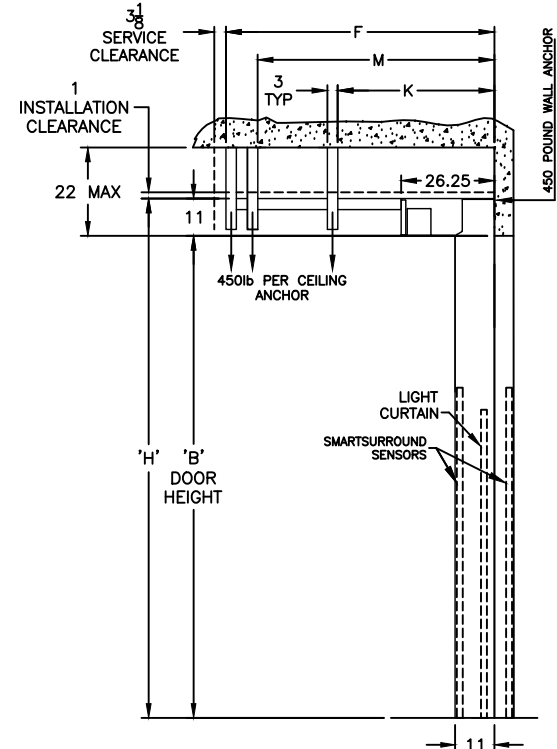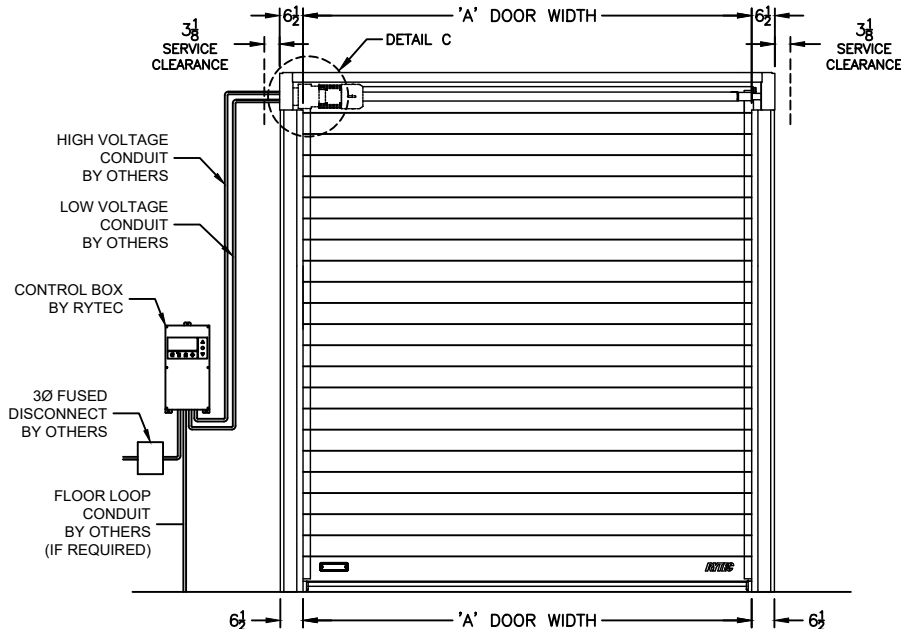

FORMULAS

$F = (B + 30.50); \text{ FOR } B < 91$
 $F = (B + 11.00); \text{ FOR } B \geq 91$
 $M = (B + 20.00); \text{ FOR } B < 91$
 $M = B; \text{ FOR } B \geq 91$
 $K = \text{NOT REQ'D}; \text{ FOR } B < 99$
 $K = 72.00; \text{ FOR } B \geq 99$

FINAL APPROVAL SIGNATURE

FABRICATION CAN PROCEED ACCORDING TO THE SPECIFICATION SHOWN EXCEPT AS NOTED

APPROVED BY: _____

PRINT NAME: _____

SIGNATURE: _____

DATE: _____

REV	DESCRIPTION	DATE	BY