
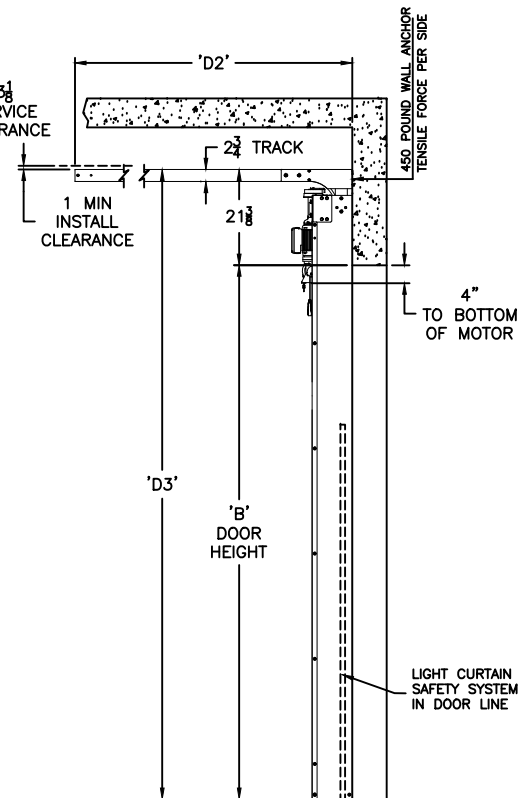
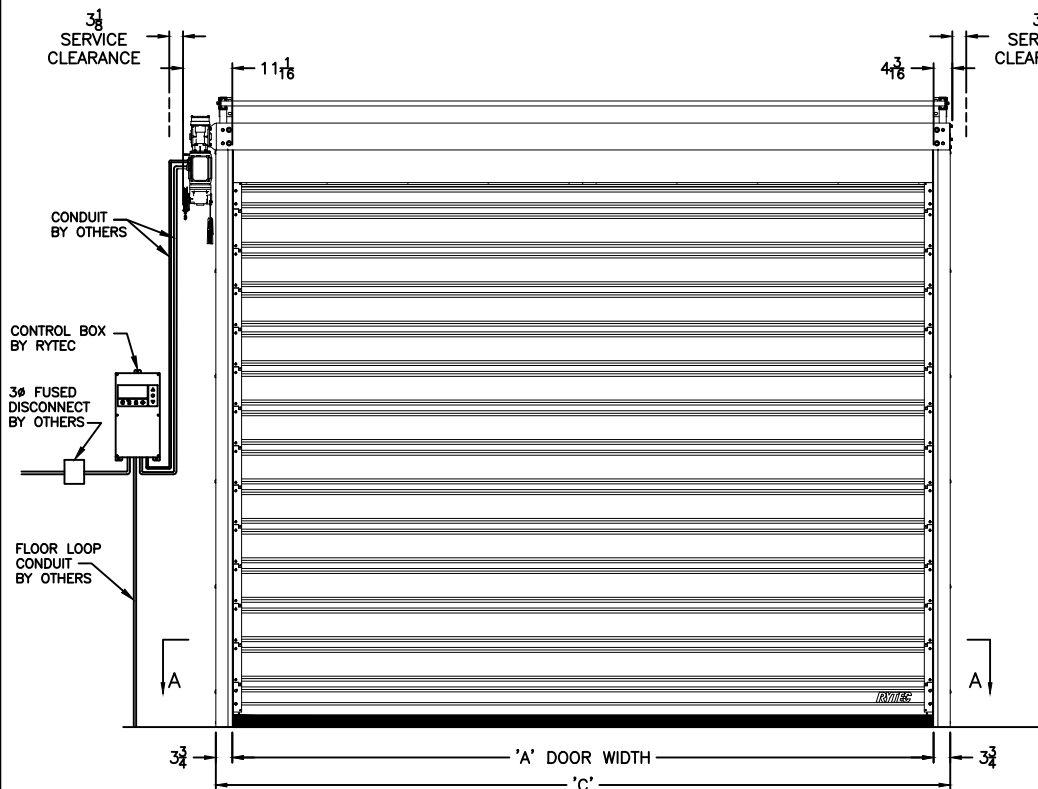


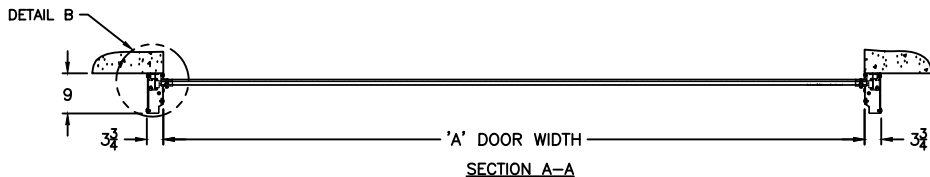

DIMENSIONAL VARIABLES

DRAWING NOT TO SCALE; DIMENSIONS IN INCHES

DOOR NO.	A	B	HI-LIFT	C	D1	D2	D3
			N/A		21.38		
MILLIMETERS			N/A		542		

ACTUAL DOOR SIZE IS PRODUCED IN MILLIMETERS
REQUESTED DOOR SIZE IS CONVERTED TO MILLIMETERS
AND ROUNDED UP TO THE NEAREST 10MM

ELECTRICAL OPTIONS

- | | |
|---|--|
| ☐ 460v - 3ph | ☐ 575v - 3ph (\$) |
| ☐ 230v/208v - 3ph | (INCLUDES NEMA 4 METAL ENCLOSURE WITH 575/460 TRANSFORMER) |
| ☐ 230v - 1ph | |
| ☐ 480v OPEN DELTA, UNGROUNDED (\$) | |

STANDARD FEATURES

1. FOR APPLICATIONS OF 75 CYCLES PER DAY OR LESS
2. SIDE COLUMNS POWDER COATED RYTEC SILVER
3. INTELLIGENT LIGHT CURTAIN SAFETY SYSTEM IN DOOR TRACK/FRAME TO 6"-6" ABOVE FLOOR LINE
4. VARIABLE DOOR OPENING SPEED; UP TO 12"/SEC
5. DOOR CLOSING SPEED OF 12"/SECOND
6. PROGRAMMABLE UPPER AND LOWER LIMITS
7. SYSTEM 4+ DRIVE AND CONTROL

UPGRADE OPTIONS

- ☐ CHAIN HOIST (\$)
- ☐ RIGHT HAND DRIVE
- ☐ ROTARY DISCONNECT (\$)
- ☐ BTA4 (BLUETOOTH ACCESS TERMINAL) (\$)
- NIGHT SWITCH FUNCTION: _____
- ☐ SELECTOR SWITCH ON CONTROL BOX (\$)
- FUNCTION: _____

PANEL OPTIONS

- ☐ INSULATED SOLID SLATS (\$)
- WINDOWS (\$)
- ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ OTHER _____
- VENTS (\$)
- ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ OTHER _____
- UP TO FOUR (4) VISION/VENT SLATS PER GROUP WITH AT LEAST ONE (1) SOLID SLAT SEPARATING GROUPS
- OR UP TO SEVEN (7) VISION/VENT SLATS PER GROUP W/ AT LEAST TWO (2) SOLID SLATS SEPARATING GROUPS.

ACTIVATION OPTIONS (\$)

- | | |
|--|---|
| ☐ _____ PUSHBUTTON | ☐ DUAL LOOP CONTROLLER |
| ☐ _____ PULL CORDS | ☐ RADIO CONTROL RCVR |
| ☐ _____ MOTION DETECTOR | (INCLUDE MIN 2 XMIT) |
| ☐ _____ PRESENCE DET. | _____ 1 BTN TRANSMITTER |
| ☐ _____ MOTION/PRESENCE | _____ 2 BTN TRANSMITTER |
| | _____ 4 BTN TRANSMITTER |

OPTION NOTES

(\$ PRICING CHANGE IF NOT INCLUDED IN QUOTE

PLEASE SPECIFY VOLTAGE

RYTEC CORPORATION

ONE CEDAR PARKWAY, JACKSON, WI 53037-0403

APPROVAL DRAWING
SPIRAL MODEL VPD - DIRECT DRIVE
STANDARD LIFT

FOR DOOR WIDTH UP TO 14'-0", HEIGHT UP TO 14'-0"

CUSTOMER: _____

LOCATION: _____

DATE: _____ REV.: A

DRAWING NO.: 713-01T -S

FORMULAS

'A' = PRODUCTION WIDTH (PW)
'B' = PRODUCTION HEIGHT (PH)
'C' = 'A' + 7.50in [190mm]
'D1' (NOT USED)
'D2' = 'B' + 0.91in [23mm]
'D3' = 'B' + 21.38in [542mm]

FINAL APPROVAL SIGNATURE



FABRICATION CAN PROCEED ACCORDING TO THE
SPECIFICATION SHOWN EXCEPT AS NOTED

APPROVED BY: _____

PRINT NAME: _____

SIGNATURE: _____

DATE: _____

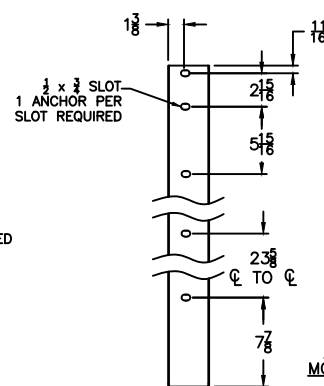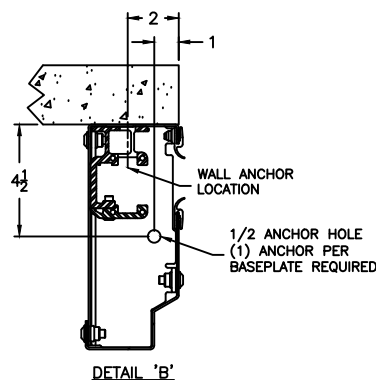

SIDE COLUMN
MOUNTING DETAIL
LEFT HAND

REV	DESCRIPTION	DATE	BY