


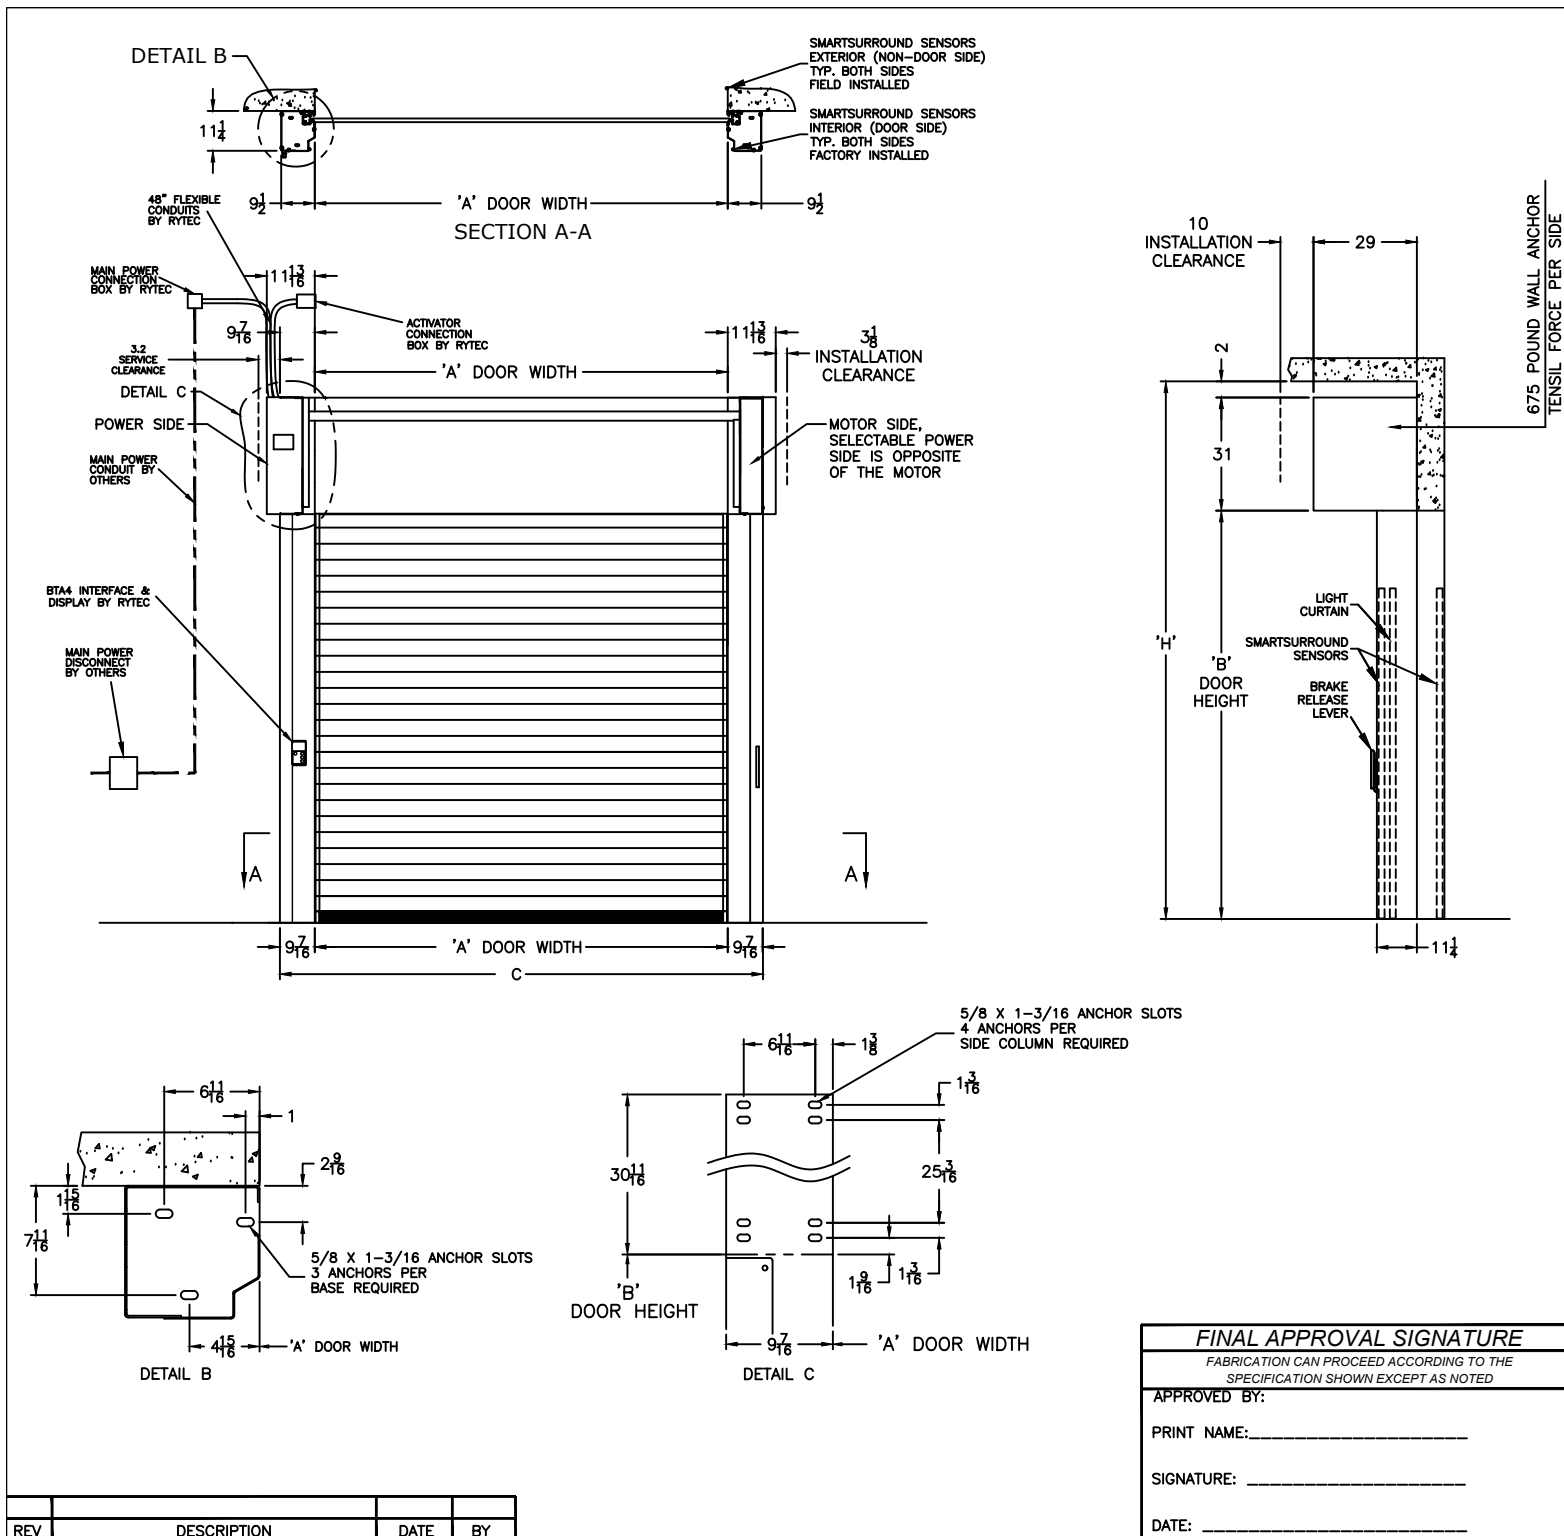

DIMENSIONAL VARIABLES																																		
DRAWING NOT TO SCALE: DIMENSIONS IN INCHES																																		
DOOR NO.	A	B	C	H																														
MILLIMETERS																																		
ACTUAL DOOR SIZE IS PRODUCED IN MILLIMETERS REQUESTED DOOR SIZE IS CONVERTED TO MILLIMETERS AND ROUNDED UP TO THE NEAREST 10MM																																		
ELECTRICAL OPTIONS																																		
☐ 460v - 3ph ☐ 230v/208v - 3ph ☐ 230v - 1ph		☐ FUSED DISCONNECT ☐ 480v OPEN DELTA, UNGROUNDED (\$)																																
STANDARD FEATURES																																		
1. SIDE COLUMN AND HEAD CONSOLE POWDER COATED RYTEC SILVER. 2. INTELLIGENT LIGHT CURTAIN SYSTEM IN DOOR LINE TO 6'-0" ABOVE FINISHED FLOOR. 3. SMARTSURROUND ADVANCED DETECTION AND ALERT SYSTEM. 4. VARIABLE DOOR OPENING SPEED; UP TO 60"/SEC. 5. PROGRAMMABLE UPPER AND LOWER LIMITS. 6. SYSTEM 4+ DRIVE AND CONTROL. 7. BRAKE RELEASE LEVER ON SIDE COLUMN. 8. PREMIUM PRE-WIRED PACKAGE. 9. SELECTABLE POWER SIDE ALWAYS OPP OF MOTOR																																		
UPGRADE OPTIONS																																		
BRAKE RELEASE LEVER: ☒ SIDE COLUMN ☐ REMOTE MOUNT (\$) ☐ BOTH (\$) ☐ NONE-REMOTE ☐ SLANT HOOD (INCLUDES FRONT/BOTTOM COVERS) (\$) ☐ FLAT HOOD (INCLUDES FRONT/BOTTOM COVERS) (\$) ☐ FRONT AND BOTTOM HEAD COVERS ONLY (\$) ☐ RIGHT HAND POWER/LEFT HAND MOTOR ☒ BTA4 (BLUETOOTH ACCESS TERMINAL) ☐ BTA4 NIGHT SWITCH SIDE COLUMN MOUNT: ☒ LH ☐ RH ☐ NONE-REMOTE FUNCTION: <u>ADVISE FUNCTION</u> ☐ FULL HEIGHT ACTIVE REVERSING EDGE SENSOR (\$)																																		
PANEL OPTIONS																																		
☐ INSULATED SOLID SLATS (\$) <table border="0"> <tr> <td colspan="5">WINDOWS (\$)</td> </tr> <tr> <td>☐ 1</td> <td>☐ 2</td> <td>☐ 3</td> <td>☐ 4</td> <td>☐ OTHER ____</td> </tr> <tr> <td colspan="5">VENTS (\$)</td> </tr> <tr> <td>☐ 1</td> <td>☐ 2</td> <td>☐ 3</td> <td>☐ 4</td> <td>☐ OTHER ____</td> </tr> <tr> <td colspan="5">VISION HEIGHT (DIM 'J')</td> </tr> <tr> <td>☐ 33"</td> <td>☐ 39"</td> <td>☐ 51"</td> <td colspan="2"></td> </tr> </table> UP TO FOUR (4) VISION/VENT SLATS PER GROUP WITH AT LEAST ONE (1) SOLID SLAT SEPARATING GROUPS. OR UP TO SEVEN (7) VISION/VENT SLATS PER GROUP W/ AT LEAST TWO (2) SOLID SLATS SEPARATING GROUPS.					WINDOWS (\$)					☐ 1	☐ 2	☐ 3	☐ 4	☐ OTHER ____	VENTS (\$)					☐ 1	☐ 2	☐ 3	☐ 4	☐ OTHER ____	VISION HEIGHT (DIM 'J')					☐ 33"	☐ 39"	☐ 51"		
WINDOWS (\$)																																		
☐ 1	☐ 2	☐ 3	☐ 4	☐ OTHER ____																														
VENTS (\$)																																		
☐ 1	☐ 2	☐ 3	☐ 4	☐ OTHER ____																														
VISION HEIGHT (DIM 'J')																																		
☐ 33"	☐ 39"	☐ 51"																																
ACTIVATION OPTIONS (\$)																																		
☐ _ PUSHBUTTON ☐ _ PULL CORDS ☐ _ MOTION DETECTOR		☐ DUAL LOOP CONTROLLER ☐ _ PRESENCE DET. ☐ _ MOTION/PRESENCE																																
OPTION NOTES																																		
(\$) = PRICING CHANGE IF NOT INCLUDED IN QUOTE ****PLEASE SPECIFY VOLTAGE & CONFIRM POWER SIDE*** ****PLEASE SPECIFY SELECTOR SWITCH FUNCTION***																																		
RYTEC CORPORATION ONE CEDAR PARKWAY, JACKSON, WI 53037-0403																																		
APPROVAL DRAWING SPIRAL MODEL SST-L/R WITH PRE-WIRED PACKAGE FOR DOOR WIDTH UP TO 13'-1", HEIGHT UP TO 13'-1"																																		
CUSTOMER:																																		
LOCATION:																																		
DATE:				REV.: C																														
DRAWING NO.: 722-01T-PREWIRED																																		