
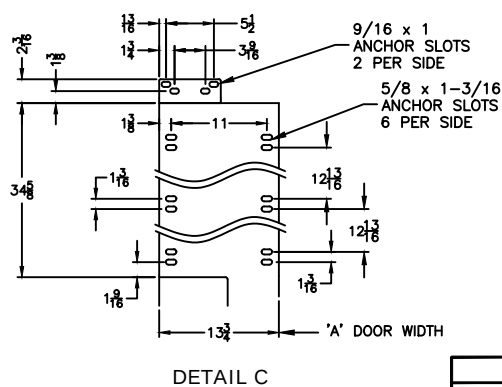


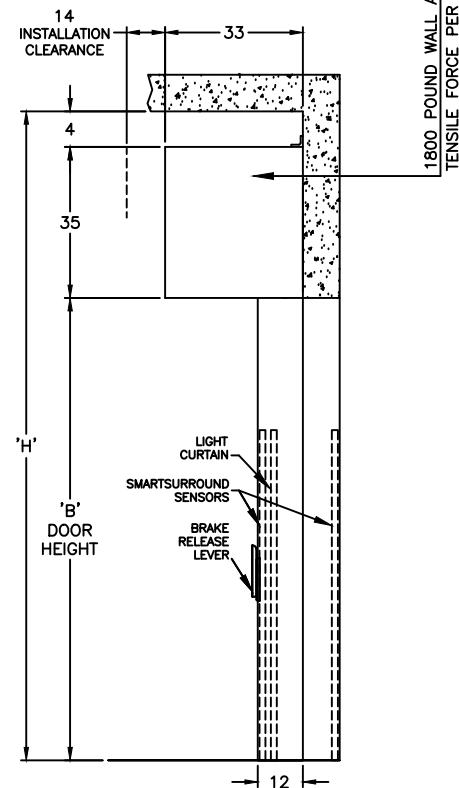

DIMENSIONAL VARIABLES DRAWING NOT TO SCALE: DIMENSIONS IN INCHES				
DOOR NO.	A	B	C	H
MILLIMETERS				
ACTUAL DOOR SIZE IS PRODUCED IN MILLIMETERS REQUESTED DOOR SIZE IS CONVERTED TO MILLIMETERS AND ROUNDED UP TO THE NEAREST 10MM				
ELECTRICAL OPTIONS				
☐ 460v - 3ph ☐ 230v/208v - 3ph ☐ 230v - 1ph ☐ 480v OPEN DELTA, UNGROUNDED (\$)		☐ 575v - 3ph (\$) (INCLUDES NEMA 4 METAL ENCLOSURE WITH 575/460 TRANSFORMER)		
STANDARD FEATURES				
1. SIDE COLUMN AND HEAD CONSOLE POWDER COATED RYTEC SILVER. 2. INTELLIGENT LIGHT CURTAIN SYSTEM IN DOOR LINE TO 6'-0" ABOVE FINISHED FLOOR. 3. SMARTSURROUND ADVANCED DETECTION AND ALERT SYSTEM. 4. VARIABLE DOOR OPENING SPEED; UP TO 60"/SEC. 5. PROGRAMMABLE UPPER AND LOWER LIMITS. 6. SYSTEM 4+ DRIVE AND CONTROL. 7. BRAKE RELEASE LEVER ON SIDE COLUMN.				
UPGRADE OPTIONS				
BRAKE RELEASE LEVER: ☒ SIDE COLUMN ☐ REMOTE MOUNT (\$) ☐ BOTH (\$) ☐ SLANT HOOD (INCLUDES FRONT/BOTTOM COVERS) (\$) ☐ FLAT HOOD (INCLUDES FRONT/BOTTOM COVERS) (\$) ☐ FRONT AND BOTTOM HEAD COVERS ONLY (\$) ☐ RIGHT HAND DRIVE ☐ ROTARY DISCONNECT (\$) ☐ BTA4 (BLUETOOTH ACCESS TERMINAL) (\$) SIDE COLUMN MOUNT: ☐ LH ☐ RH ☐ NONE-REMOTE ☐ BTA4 NIGHT SWITCH (\$) FUNCTION: _____ ☐ FULL HEIGHT ACTIVE REVERSING EDGE SENSOR (\$)				
PANEL OPTIONS				
☐ INSULATED SOLID SLATS (\$) WINDOWS (\$) ☐ 1 ☐ 2 ☐ 3 ☐ 4 OTHER _____ VENTS (\$) ☐ 1 ☐ 2 ☐ 3 ☐ 4 OTHER _____				
UP TO TWO (2) VISION/VENT SLATS PER GROUP WITH AT LEAST ONE (1) SOLID SLAT SEPARATING GROUPS. MAXIMUM TEN (10) VISION/VENT SLATS TOTAL IF A<=276 MAXIMUM FOUR (4) VISION/VENT SLATS TOTAL IF A>276				
ACTIVATION OPTIONS (\$)				
☐ — PUSHBUTTON ☐ — PULL CORDS ☐ — MOTION DETECTOR ☐ — PRESENCE DET.		☐ DUAL LOOP CONTROLLER ☐ RADIO CONTROL RCVR (INCLUDE MIN 2 XMIT) — 1 BTN TRANSMITTER — 2 BTN TRANSMITTER — 4 BTN TRANSMITTER		
OPTION NOTES				
(\$) = PRICING CHANGE IF NOT INCLUDED IN QUOTE ****PLEASE SPECIFY VOLTAGE****				
RYTEC CORPORATION ONE CEDAR PARKWAY, JACKSON, WI 53037-0403				
APPROVAL DRAWING SPIRAL MODEL SST-US/R FOR DOOR WIDTH UP TO 26'-3", HEIGHT UP TO 16'-4"				
CUSTOMER: _____				
LOCATION: _____				
DATE: _____				REV.: A
DRAWING NO.: 720-01T				