




BANTAM[®]

Economical, Break-Away Dock Door Alternative

The Bantam[®] roll door is an economical fabric door alternative for high maintenance overhead dock doors. The low profile design accommodates most dock applications and alternative uses with low to moderate traffic. Durable components allow for accidental impact and break-away system allows for easy reset.


Manual operation is standard via a pull-chain hoist, with optional motorized operation available. Panel material, roll and door covers, and motorized reversing edge are also optional add-ons.

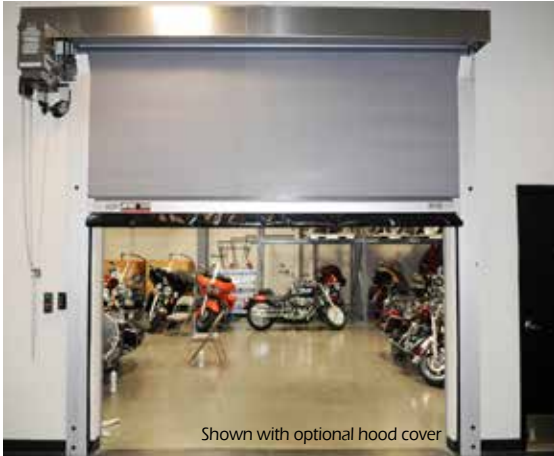

- Takes a Hit**
 - Quick-Set™ Break-Away™ system allows door to be reset in seconds
- Easy Operation**
 - Manual door operation with chain hoist and speed governor
- Low Profile**
 - 6-1/4 inches of side clearance
 - 4-inches of side column projection
- Wind Resistant**
 - Wind ribs provide stiff resistance from wind and negative pressure
- Visible Value**
 - 17-inch replaceable window
 - Optional full-width vision panel
- Protective Seals**
 - Weatherseals in side columns and top
 - Vinyl loop seal on bottom bar

BANTAM[®]

HIGH PERFORMANCE MANUALLY-OPERATED DOOR



Size/Dimensions

- Up to 10'W x 10'H (manual)
- Up to 15'W x 14'H (motorized)
- 16.5" headroom above lintel
- 13" (manual) or 16" (motorized) head projection
- 4" side column projection
- 7" (w/o hood) or 8" (w/hood) side clearance, non-drive side (manual)
- 7" (w/o hood) or 8.5" (w/hood) side clearance, non-drive side (motorized)
- 12" (w/o hood) or 13" (w/hood) side clearance, drive side (manual)
- 12" (w/o hood) or 13" (w/hood) side clearance, drive side (motorized)
- 20" (w/o hood) or 20.3" (w/hood) side clearance, drive side (manual)
- 20" (w/o hood) or 20.3" (w/hood) side clearance, drive side (motorized)
- Chain hoist/motor placement on right or left side

Travel Speed

- Manual open speed or motorized opening speed up to 12 inches per second

Operation

- Manual drive system opening and closing is manually operated by use of a chain hoist and speed governor
- Optional motorized drive system with up/down switch (constant pressure required)



Manual chain hoist


Side Frames

- Fully bolt-together anodized aluminum construction
- Full-height weatherseal to seal against panel material

Panel Design

- Vinyl panel material with integral connective ribs and a 17" window
- Integral ribs provide stiff resistance against wind and negative pressure
- Velcro-sealed PVC or screen windows can be replaced quickly and easily

Integral wind rib with optional screen material shown



Break-Away™ Bottom Bar

- Quick-Set™ Break-Away™ tabs allow the bottom bar to release in either direction without damaging the door
- Bottom bar is easily reset in seconds, without tools

Easily resets without tools



Warranty

- One-year limited warranty on mechanical and electrical components
- One-year limited warranty on vinyl panel material
- Three-year limited warranty on optional 2-ply panel material



Options

- 2-ply, USDA-compliant or screen panels
- 17" windows or full-width vision panel
- Hood cover, flat or slant
- Motorized-ready configuration
- Motorized operation complete with one open/close/stop push button and pneumatic reversing edge
- Aluminum roll and door operator cover

Motorized configuration with push button



Standard maximum sizes shown; larger sizes may be available upon request.

American Owned, American Made



◀ Watch All Rytec Testimonials

Specifications subject to change
© 2020 Rytec Corporation LIT072720

RytecDoors.com
888-GO-RYTEC

info@rytecdoors.com
P: 262.677.9046 F: 262.677.2058
One Cedar Parkway, PO Box 403
Jackson, WI 53037-0403

