



HIGH PERFORMANCE HIGHLIGHT FOR FLEXIBLE EDGE APPLICATIONS

FLEXTEC™ SOFT-EDGE HIGH PERFORMANCE DOOR

FLEXIBLE BY DESIGN

Engineered to flex around obstructions and easily release from side columns if needed yet durable against wind and pressure resistance, the FlexTec eliminates entrapment concerns.

SELF-REPAIRING CAPABILITIES

Automatically self-repairs without user intervention if impacted from either direction reducing downtime, maintenance and repairs.

MAXIMUM SPEED

Operates up to 4 times faster than competitive doors. The FlexTec door opens at up to 100 inches per second reducing risk of impact.

MAXIMUM SAFETY

High-tech Advanced³ Light Curtain Safety System, Pathwatch[®] Safety Light System and flexible bottom edge -all standard safety features.

INDUSTRY-LEADING WARRANTY

FlexTec is backed by a 1 million cycle/5-year* warranty on motor/mechanical components, drive teeth and 1-ply Rylon™ panel material; 2-year limited warranty on electrical components.

ACCOMMODATES LARGER OPENINGS


The FlexTec™-T (tall) model provides flexibility to even larger openings, up to 20' high, with the same great soft bottom edge.

DURABLE MATERIALS

Low-friction drive system, edge-to-edge seals, removable/replaceable 20" windows and 1-ply Rylon™ panel for sustained reliability.

CONTROL & PERFORMANCE

Watertight, NEMA 4X System 4[®] Controller plus heavy duty gear box/motor for unmatched reliability in the most demanding high cycle environments.

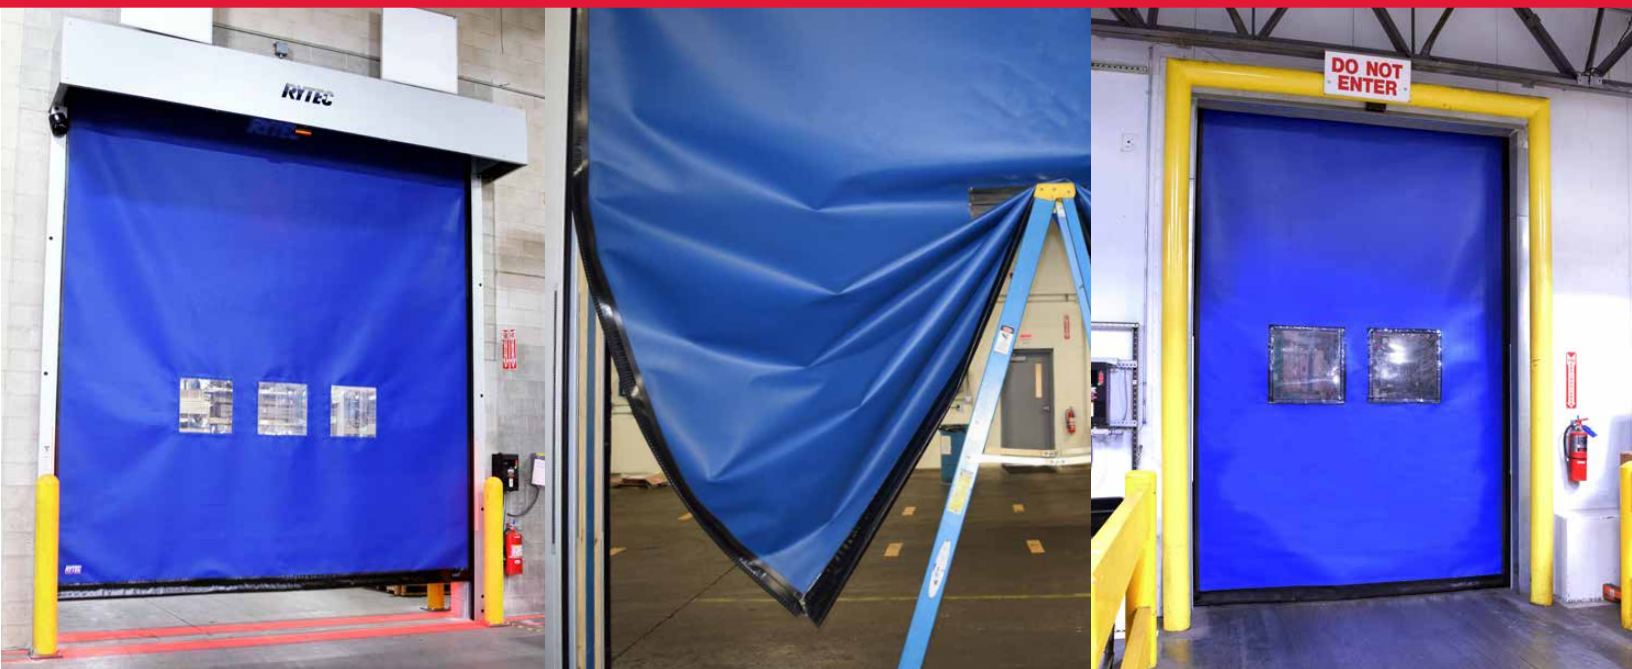

Discover why leading plant managers, engineers and contractors specify Rytec High Performance Doors.

American Owned, American Made



◀ Watch All Rytec Testimonials

*Whichever occurs first. Specifications subject to change. © 2020 Rytec Corporation LIT020420

RytecDoors.com 888-GO-RYTEC

info@rytecdoors.com P: 262.677.9046 F: 262.677.2058
One Cedar Parkway, PO Box 403, Jackson, WI 53037-0403

QUALITY. PERFORMANCE. RELIABILITY.