

# RYTEC

HIGH PERFORMANCE DOORS

# PREDADOOR<sup>®</sup> NXT<sup>®</sup>

HIGH PERFORMANCE ROLLING DOOR




## PREDADOOR<sup>®</sup> NXT<sup>®</sup>

America's Leading High-Speed Door Taken to the Next Level

Rytec's PredaDoor NXT is the top-selling high-performance door with next-generation features. It is the most advanced direct drive roll door available for multi-industry, day in, day out use.

Contoured side columns offer a tight perimeter seal, with advanced wireless safety system and durable components to provide unsurpassed performance and reliability. The NXT Quick-Set™ repair system and System 4<sup>®</sup> door controller minimize door downtime.

The PredaDoor NXT is ideal for interior and exterior applications where speed, low maintenance and dependability are critical.

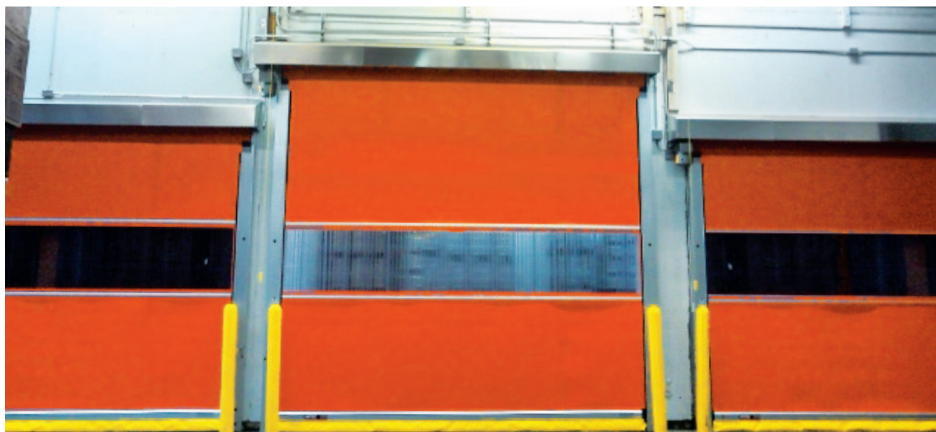

### High Speed

- Opening speed of up to 50 inches per second improves traffic flow, productivity and energy conservation

### Safety Focused

- Standard Pathwatch<sup>®</sup> Safety Light System, dual photo eyes and bottom bar reversing edge provide enhanced safety

### Durable Panel

- Integral wind ribs
- Full width, replaceable vision panel
- 2-ply, 3-ply Rilon<sup>®</sup> or USDA-compliant panel material options

### Smooth Operation

- Advanced System 4<sup>®</sup> door controller enables precise door positioning, speed adjustment and control of all door functions

### Full-Perimeter Seals

- Two brush seals in each side column
- Brush seal at top of the door
- Vinyl loop along floor

QUALITY. PERFORMANCE. RELIABILITY.

RYTECDOORS.COM

# PREDADOOR<sup>®</sup> NXT<sup>®</sup>

## HIGH PERFORMANCE ROLLING DOOR



Automotive  
Dealership



Food and  
Beverage



Warehousing  
& Distribution



Cold  
Storage



Parking

### Size/Dimensions

- Up to 16'W x 15'H
- 20" headroom above lintel
- 17" head projection
- 4" side column projection
- 8" side clearance, non-drive
- 16" side clearance, motor side
- Left or right hand motor placement

### Travel Speed

- Opening speed up to 50 inches per second

### Operation

- Variable speed AC drive provides soft acceleration and deceleration
- Independent opening and closing speeds for flexibility

Direct drive motor



### Ry-Wi<sup>®</sup> Wireless System

- Continuous and uninterrupted signal eliminates need for coil cords
- Self-contained system with directional transmitters and receivers operate independently on each door

Automatic sleep mode extends battery life



### Perimeter Seals

- Full-height brush seals on both side columns
- Edge-to-edge brush seal at top of door
- Vinyl loop forms tight seal along floor

### Electrical Controls

- System 4<sup>®</sup> controller housed in a NEMA 4x rated enclosure with factory set parameters
- Intelligent processor monitors and controls power consumption
- Advanced self-diagnostics for troubleshooting

System 4 shown with optional rotary disconnect



Standard maximum sizes shown; larger sizes may be available upon request.

### Panel Design

- 71 oz, 2-ply Rilon<sup>®</sup> panel
- 2 Aluminum wind ribs
- Full-width replaceable vision panel
- Vertically flexible, but laterally stiff material helps door panel remain within the guides even if there is wind or pressure
- Puncture-resistant, polymer-impregnated monofilament polyester fabric

### Break-Away<sup>™</sup> Bottom Bar

- Quick-Set<sup>™</sup> Break-Away<sup>™</sup> tabs allow the wireless bottom bar to release in either direction without damaging the door
- Cutoff switches automatically shut off motor if bottom bar is impacted
- Auto reset with a push of a button after bottom bar is aligned



Quick-Set tabs for damage free release

### Safety

- Standard Pathwatch<sup>®</sup> Safety Light System
- Standard dual thru-beam photo eyes
- Standard sensitivity-adjustable pneumatic reversing edge
- Standard Ry-Wi<sup>®</sup> Wireless System

### Warranty

- Two-year limited warranty on mechanical and electrical components
- Three-year limited warranty on 2-ply Rilon<sup>®</sup> panel material



### Options

- 3-ply Rilon<sup>®</sup>, USDA-compliant or tear-resistant vinyl door
- Hood and motor cover
- Fiberglass wind ribs
- Vinyl weatherseals
- Stainless steel columns, bottom bar, hood or motor covers
- Car wash configuration - consult factory for details

American Owned, American Made



◀ Watch All Rytec Testimonials

Specifications subject to change  
© 2018 Rytec Corporation LIT021918

**RytecDoors.com**  
888-GO-RYTEC

info@rytecdoors.com  
P: 262.677.9046 F: 262.677.2058  
One Cedar Parkway, PO Box 403  
Jackson, WI 53037-0403

**RYTEC**

HIGH PERFORMANCE DOORS