

RYTEC

HIGH PERFORMANCE DOORS

TURBO-SEAL[®] INSULATED


HIGH PERFORMANCE INSULATED ROLLING DOOR

TURBO-SEAL[®] INSULATED



Simply the Industry's Fastest, Most Energy-Efficient Insulated Door

With unrivaled speed and extraordinary insulating capacity, the Turbo-Seal Insulated door is the definitive solution for cold storage environments. This revolutionary door is built on the proven Turbo-Seal platform for unmatched reliability and lasting performance.

Turbo-Seal Insulated features an average speed of over 101 inches per second making it ideal for demanding cold storage environments and fast-moving food and beverage operations.



Rilon
Thermal Panel

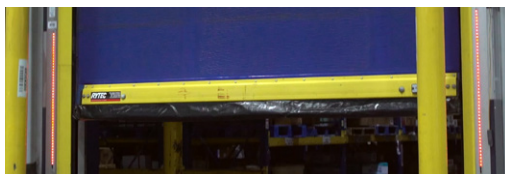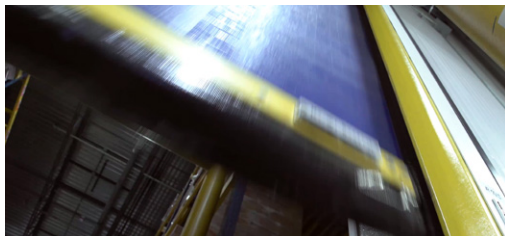

Extremely Fast and Quiet

- Peak speed of up to 182" per second and average speed of up to 101" per second

Rilon Thermal (3.0) Panel

- One-inch thick, closed-cell foam panel with R-4 insulated value
- Laterally-rigid and vertically flexible with non-porous, moisture-proof vapor barrier for uniform performance

Perimeter Seals and Thermal Breaks

- Quad seals on front and back of panel
- Top brush and low temperature bottom edge seal help eliminate ice propagation
- Full perimeter thermal breaks

Self-Repairing

- Break-away panel instantly self-repairs and resets automatically without manual intervention needed

Safety is Standard

- Pathwatch[®] Safety Light System, pneumatic reversing edge and thru-beam photo eyes

QUALITY. PERFORMANCE. RELIABILITY.

RYTECDOORS.COM

TURBO-SEAL[®] INSULATED

HIGH PERFORMANCE INSULATED ROLLING DOOR



Cold Storage



Food and Beverage

Size/Dimensions

- Up to 12'W x 21'H
- 39" or 41" headroom above lintel
- 32" or 34" head projection
- 6" side column width
- 9.5" -10.5" side column projection
- 10" side clearance, non-drive side
- 18" side clearance, motor side
- Motor placement on right or left side

Travel Speed


- Peak speed of up to 182" per second
- Average speed of up to 101" per second

Operation

- Three horsepower motor
- Counterbalanced with heavy duty straps to assist motor and reduce energy consumption

Head Assembly

- Integrated fork pockets reduce head clearance requirements and simplify installation
- Construction of support frame allows for easier maintenance and access to door components

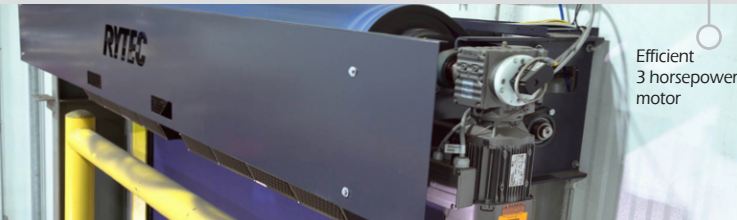

Efficient 3 horsepower motor

Thermal Performance

- Rilon thermal panel
- Quad seals in side column
- Top brush seal
- Integral bottom edge seal
- Integrated thermal breaks around entire door assembly

Electrical Controls


- System 4[®] controller housed in a NEMA 4X rated enclosure with factory set parameters
- Intelligent processor monitors and controls power consumption
- Advanced self-diagnostics for troubleshooting

System 4 shown with optional rotary disconnect



Panel Construction


- 1" thick insulated panel
- Three-layer construction consisting of Rilon, closed-cell foam and proprietary thermally-laminated protective film
- Uniform thermal performance from edge-to-edge
- No heat-sealed pockets, stitching, spun insulation or quilted pads



Rilon (3.0) Thermal Panel

Side Column Construction

- Extruded aluminum and fiberglass construction
- Modular design for easy brush seal or fiberglass section replacement
- Counterweight strap inspection window
- Low profile side column




Low profile footprint with integral thermal breaks

Bottom Bar

- Low profile bottom bar with integral thermal breaks
- Completely sealed battery enclosure eliminates moisture build-up
- Thermal break-away tabs provide a tight seal in the side column
- Fully sealed reversing edge with floor sweep

Safety is Standard

- Pathwatch[®] Safety Light System
- Dual thru-beam photo eyes
- Sensitivity-adjustable pneumatic reversing edge
- Ry-Wi[®] Wireless System



Pathwatch Safety System

Warranty

- One-year limited warranty on materials and workmanship
- One-year limited warranty on insulated panel
- Lifetime warranty on counterweights

Options

- Single source transformer

Standard maximum sizes shown; larger sizes may be available upon request.

American Owned, American Made



◀ Watch All Rytec Testimonials

Specifications subject to change
© 2018 Rytec Corporation LIT120418

RytecDoors.com
888-GO-RYTEC

info@rytecdoors.com
P: 262.677.9046 F: 262.677.2058
One Cedar Parkway, PO Box 403
Jackson, WI 53037-0403

RYTEC
HIGH PERFORMANCE DOORS