


Summary	Changing the mounting for wireless antenna on Turbo Seals with mount side blowers.				
Products Affected	Turbo Seal Freezers with blowers and wireless bottom bars				
Key Word Tags					
Tools/Equipment (If Required)					
Parts/Materials (If Required)					
Related Media					
Author	Jeff Bossert, RevA M. Burzlaff	Issue Date	4/28/2009	Status	Active

Please Read The Entire Bulletin Before Proceeding

Moving the antenna on a Turbo Seal will only apply to doors that have front clearance issues with the blower. What we do in this case is raise the overall height of the door to allow the blower to mount directly under the head without affecting the door opening height. (see figure 1.) When the blower is mounted under the head on a wireless door it will block the line of sight between the mobile unit and the antenna. The antenna will need to be moved to the blower bracket to allow the two to communicate properly. The antenna will be mounted in the standard location for shipping purposes.

- 1) Once the door is installed, remove the antenna from the standard mounting position.
- 2) Attach the antenna to the bottom side of the new mounting position using tapered head bolts in the small parts bag. It is critical to the communication to have a flat surface on the top flange of the antenna bracket.
- 3) Make sure that the copper colored wire between the encoder and antenna is not kinked or pinched.

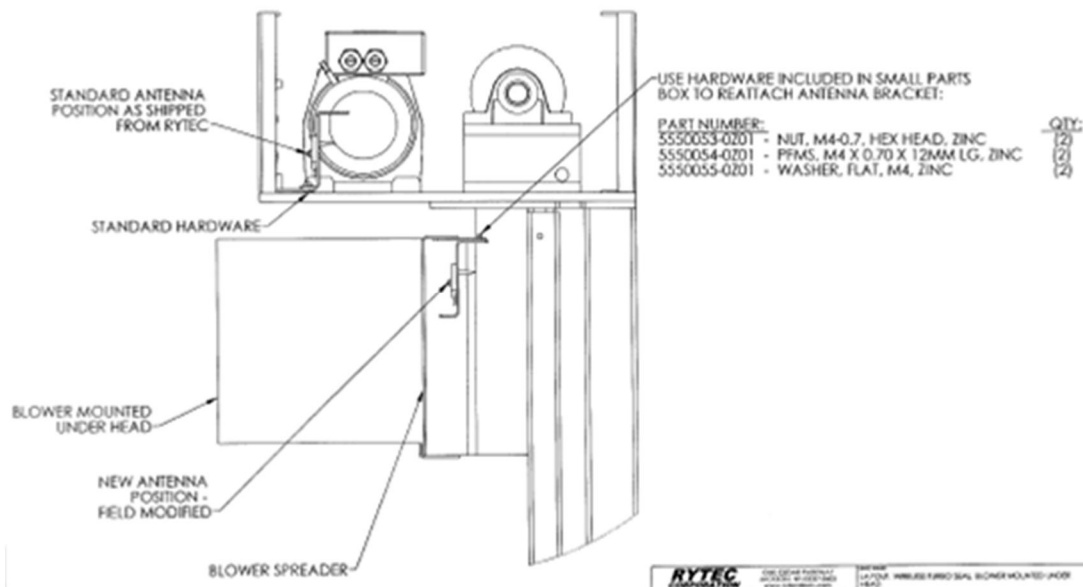

If you have any questions please contact Rytec Customer Support at 1-800-628-1909.

