




Loading

HIGH-PERFORMANCE DOORS FOR SELF-STORAGE FACILITIES

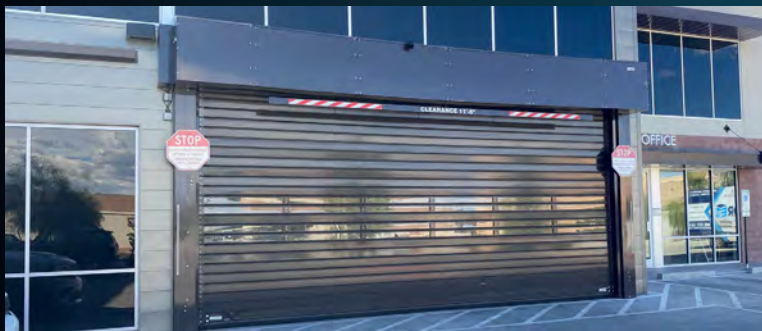

HIGH-PERFORMANCE DOORS FOR SELF-STORAGE FACILITIES

Spiral®



- Exclusive, patented technology
- Rigid aluminum double walled slats with integral rubber weatherseals
- Insulated, ventilated or vision slat options available
- Opening speed up to 60 inches per second



Spiral® FV® (Full Vision)



- Full-width continuous window slats provide excellent visibility
- Sleek, high-tech aesthetics
- Shatter-proof and scratch resistant LEXAN™ slats
- Standard clear plus bronze and grey tinted options
- Opening speed up to 100 inches per second



Spiral® LH® (Low Headroom)




- Low lintel design requires as little as 11 inches of headroom
- Rigid aluminum double walled slats with integral rubber weatherseals
- Insulated, ventilated or vision slat options available
- Opening speed up to 60 inches per second



Spiral® LP (Low Profile)



- Low profile side column and low headroom configuration reduces clearances
- Rigid aluminum double-walled slats with integral rubber weatherseals
- Insulated, ventilated or vision slat options available
- Opening speed up to 36 inches per second



Spiral® HZ® (Hurricane Zone)

- Missile impact tested and can withstand winds up to 175 mph
- Certified for compliance with Miami-Dade County and the Florida Building Code.*
- Opening speed up to 60 inches per second



Spiral® LH®-HZ® (Low Headroom, Hurricane Zone)

- Missile impact tested and can withstand winds up to 175 mph
- Certified for compliance with Miami-Dade County and the Florida Building Code*
- Low lintel design requires as little as 11 inches of headroom
- Opening speed up to 60 inches per second




RYTEC SPIRAL® VS. CONVENTIONAL DOORS

- ▶ Rytec doors are extremely low maintenance compared to traditional conventional doors usually associated with regular high maintenance wear parts
- ▶ Rytec doors use a variable-speed drive operator instead of a standard DC brake motor and open at up to 60-100 inches per second compared to an average 6-10 inches per second for conventional doors
- ▶ Conventional doors usually run with continuous metal-to-metal contact shortening the lifespan of parts and the door; Rytec doors have no metal-to-metal contact providing a longer lifespan

RYTEC SPIRAL®




CONVENTIONAL





PATENTED SPIRAL® TECHNOLOGY

Our Spiral Series doors offer a unique spiral track design that ensures no metal-to-metal contact for ultra-quiet operation. This also guards against wear and tear on the aluminum panel, resulting in minimal maintenance, preserved aesthetics and longer life.



SAFETY FOCUSED

Rytec offers multiple standard and optional safety features to provide safeguards and assure operational standards.

- SmartSurround® Detection & Alert System
- Advanced³ Light Curtain Safety System
- Pathwatch®/Pathwatch II Safety Light Systems
- Reversing edge with Ry-Wi® Wireless System
- Dual thru-beam photo eyes



PERFORMANCE UNDER CONTROL

Our next generation exclusive System 4® and BT44 remote door controllers provide greater functionality and unprecedented efficiency for Rytec doors. Featuring smart technology, easy installation and a standard NEMA 4X rated (or equivalent) enclosure.

IMPROVED SECURITY

- ▶ Rapid opening and closing prohibits unauthorized access and deters 'tailgating' or 'piggybacking' activity
- ▶ Rytec SmartSurround® with motion detection can discourage pedestrian loitering by flashing LED lights
- ▶ Rigid panel slats and frame provide secure closure and LEXAN vision slats can provide visibility with scratch and shatter-resistance

REDUCED MAINTENANCE COSTS

- ▶ Specifically engineered for high-traffic, high-cycle environments, designed for day in, and day out use
- ▶ Assured operation without extensive ongoing maintenance
- ▶ Heavy-duty, durable components and construction

STYLISH AESTHETICS

- ▶ Modern, crisp lines and materials coordinate with many types of architectural styles of self-storage facilities
- ▶ Variety of RAL classic or custom match colors and additional options to help fit brand guidelines
- ▶ Whether new construction or re-purposed older buildings, variety of models available for specific needs

LASTING RELIABILITY

- ▶ Engineered to withstand the daily rigors of use and last for millions of operating cycles
- ▶ High-speed operation assures smooth, efficient, high-volume traffic flow and reduced wait times
- ▶ Custom manufactured for optimal fit and performance



North America's Leading High-Performance Door Manufacturer



QUALITY. PERFORMANCE. RELIABILITY.

Rytec doors offer our customers the highest value and day in, day out performance — and are supported by the knowledge and expertise of dedicated employees, authorized dealers and trained installers across North America. With over 150,000 doors in operation — many with millions of operating cycles — our doors provide energy savings, safety and security and require only minimal maintenance.

American Owned, American Made



◀ Watch All Rytec Testimonials

Specifications subject to change
© 2024 Rytec, a Nucor company LIT091624

RytecDoors.com

888-GO-RYTEC

info@rytecdoors.com

P: 262.677.9046

W223N16601 Cedar Parkway
Jackson, WI 53037-0403

RYTEC
a NUCOR company