



# SPIRAL<sup>®</sup> VP

LOWER SPEED, LOWER CYCLE RIGID DOOR




## SPIRAL<sup>®</sup> VP

### Architectural Design, Quality Construction and Unprecedented Value

Featuring the stylish design and structural integrity of the Spiral<sup>®</sup> high-performance door series, the Spiral<sup>®</sup> VP rigid rolling door offers a new combination of quality, value and performance in a lower speed, lower cycle design for light to moderate traffic.

Now, auto dealerships and other commercial settings can maintain a consistent aesthetic look - from front to back - without sacrificing high performance. The Spiral VP's small footprint allows the door to be installed almost anywhere a conventional overhead door fits - without visible attachment hardware. With sleek styling, quiet functioning and a compact profile, a consistent 360-degree customer experience is now a reality.

Spiral VP performance is guaranteed with a **5-year limited warranty**.

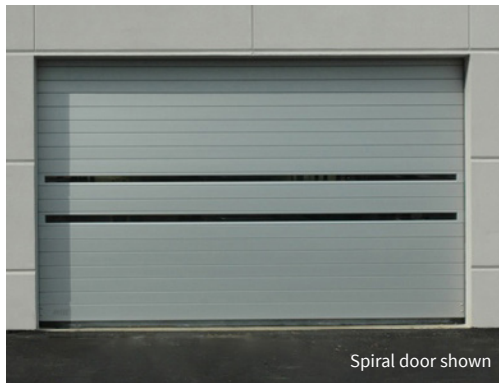

Spiral door shown

#### Unparalleled Performance

- High performance operation for lower speed/cycle settings
- Day in, day out reliability

#### Stylish Aesthetics

- Architecturally designed to complement the high-speed Spiral line of doors
- Crisp lines provide a stylish look ideal for new and existing auto dealerships and other commercial applications

#### Proven Durability

- Constructed with heavy-duty, high quality components

#### Solid Security

- Minimum 1 3/16-inch thick double walled aluminum slats
- Integral rubber weatherseal
- Continuous heavy-duty hinge system

#### Assured Operation

- Unmatched 20-year warranty on high-cycle components including rollers, hinges and door tracks
- Door components are the same as used on Spiral doors with millions of operating cycles

QUALITY. PERFORMANCE. RELIABILITY.

[RYTECDOORS.COM](http://RYTECDOORS.COM)

## RYTEC® SPIRAL® VP DIRECT DRIVE DOOR



Automotive  
Dealership



Security

### Size/Dimensions

- Up to 14'W x 14'H
- Multiple door configurations based on lift requirements

### Travel Speed

- Opens at 12 inches per second

### Operation

- Quiet, low maintenance operation
- Direct drive motor connects directly to drive shaft
- No spring or cables
- Rated for 75 cycles per day
- Compact AC drive motor with variable speeds allows for soft acceleration and deceleration
- System 4® controller housed in a NEMA 4X rated enclosure



### Construction

- 'Rytec silver' powder coated finish for increased durability
- Heavy-duty extruded aluminum door hinges
- Polyurethane rollers with sealed roller bearings
- No visible mounting hardware



Powder coated side column cover



Rollers with sealed roller bearings

### Warranty

- 20-year extended warranty on rollers, hinges and door track
- Five-year limited warranty on motor/mechanical components
- Two-year limited warranty on electrical components

### Door Panel Configuration

- Insulated door panel
- Vision slats
- Ventilated slats
- Integrated weatherseal

### Lift Configuration

- Standard lift
- Vertical lift
- High lift

### Safety is Standard

- Advanced<sup>3</sup> Light Curtain Safety System

### Options

- Chain hoist operator
- Powder coated finish available in RAL classic colors or custom match

## RYTEC® SPIRAL® VP BALANCED DOOR



Automotive  
Dealership



Security

### Size/Dimensions


- Up to 14'W x 14'H
- Multiple door configurations based on lift requirements

### Travel Speed

- Opens at 8 inches per second

### Operation

- Torsion spring balancing system assists the motor in opening
- Aircraft quality cable lift method
- Standard overhead door operator
- Rated for 50 cycles per day



### Construction

- 'Rytec silver' powder coated finish for increased durability
- Heavy-duty extruded aluminum door hinges
- Polyurethane rollers with sealed roller bearings
- No visible mounting hardware



Low-profile side track

### Warranty

- 20-year extended warranty on rollers, hinges & door track
- Five-year limited warranty on motor/mechanical components
- Two-year limited warranty on electrical components

### Door Panel Configuration

- Insulated door panel
- Vision slats
- Ventilated slats
- Integrated weatherseal

### Lift Configuration

- Standard lift
- Vertical lift
- High lift

### Safety is Standard

- Thru-beam photo eye
- Note: Not intended for automatic closing applications

### Options

- Heavy duty operator
- Chain fall
- Powder coated finish available in RAL classic colors or custom match
- Extended-life springs

Standard maximum sizes shown; larger sizes may be available upon request.

American Owned, American Made



◀ Watch All Rytec Testimonials

Specifications subject to change  
© 2023 Rytec Corporation LIT051523

RytecDoors.com

888-GO-RYTEC

info@rytecdoors.com

P: 262.677.9046 F: 262.677.2058

One Cedar Parkway, PO Box 403

Jackson, WI 53037-0403

**RYTEC**

HIGH PERFORMANCE DOORS