


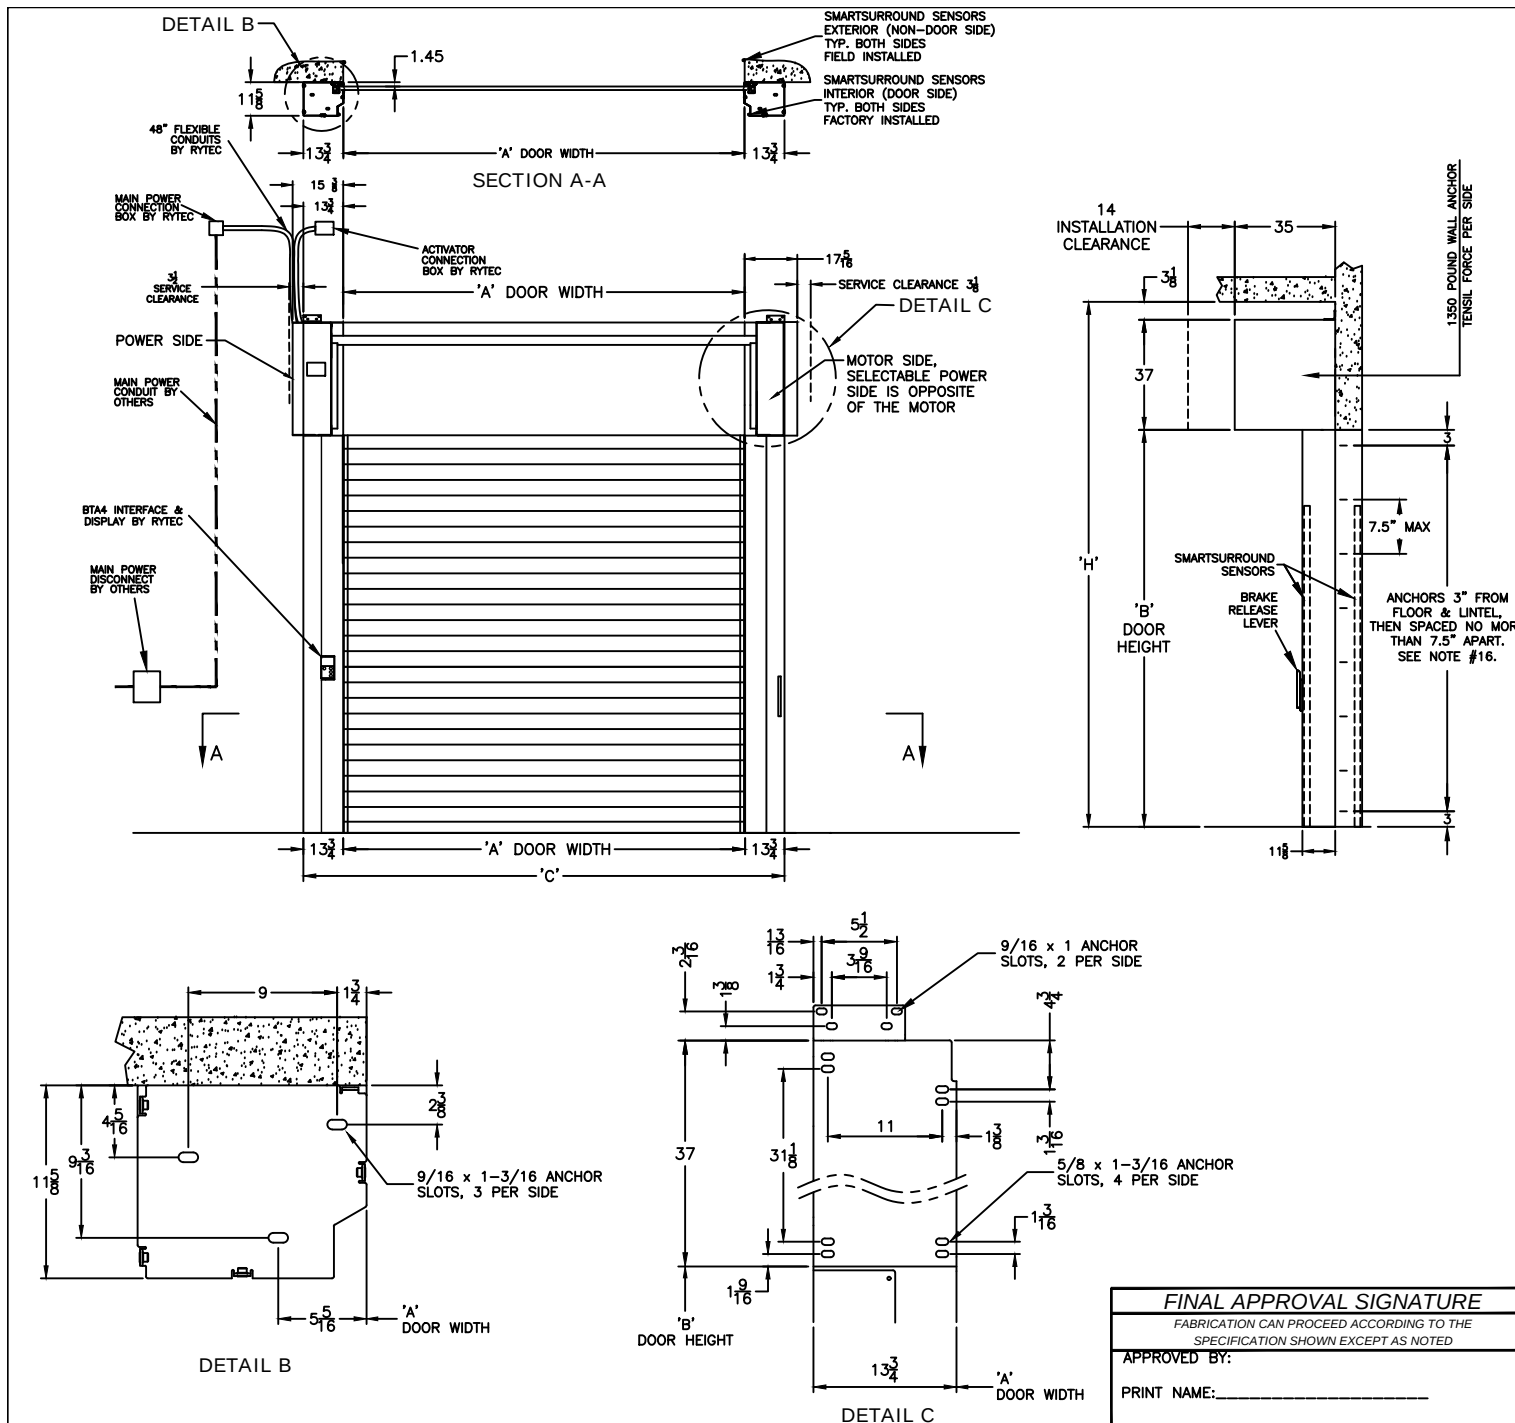

DIMENSIONAL VARIABLES

DRAWING NOT TO SCALE; DIMENSIONS IN INCHES

DOOR NO.	A	B	C	H
MILLIMETERS				

ACTUAL DOOR SIZE IS PRODUCED IN MILLIMETERS
REQUESTED DOOR SIZE IS CONVERTED TO MILLIMETERS
AND ROUNDED UP TO THE NEAREST 10MM

ELECTRICAL OPTIONS

- ☐ 460v - 3ph ☐ FUSED DISCONNECT
☐ 230v/208v - 3ph ☐ 480v OPEN DELTA
☐ 230v - 1ph ☐ 480v OPEN DELTA, UNGROUNDED (\$)

STANDARD FEATURES

- CARBON STEEL POWDER COATED HEAD & SIDE COLUMN COMPONENTS.
- SMARTSURROUND ADVANCED DETECTION AND ALERT SYSTEM.
- VARIABLE DOOR OPENING SPEED; UP TO 60"/SEC.
- PROGRAMMABLE UPPER AND LOWER LIMITS.
- NEMA 4X SYSTEM 4 CONTROL BOX (8.5"x16.5").
- BRAKE RELEASE LEVER ON SIDE COLUMN.
- ELECTRICAL FAIL SAFE REVERSING EDGE
- HEAVY DUTY ROLLERS AND GUIDE TRACK
- INSULATED PANEL SLATS
- DOOR APPROVED FOR USE IN AND OUTSIDE HVHZ
- DOOR APPROVED FOR LARGE MISSILE IMPACT
- REGISTERED BY FBC APPROVAL # FL28502-R3
- REGISTERED BY MIAMI DADE NOA # 23-0929.05
- PREMIUM PRE-WIRED PACKAGE.
- SELECTABLE POWER SIDE ALWAYS OPP OF MOTOR
- CONCRETE ANCHORS TO BE 3/4" DIA. X 4-1/2" LONG, RED HEAD ITW TRUBOLT WEDGE OR HILTI KWIK BOLT 4 EXPANSION ANCHORS. SHALL BE INSTALLED FOLLOWING ALL RECOMMENDATIONS AND SPECS OF THE ANCHOR MANUFACTURER. ANCHORS TO BE INSTALLED IN MIN. 4000PSI CONCRETE WITH MIN. EMBEDMENT OF 2-1/4".

UPGRADE OPTIONS

- BRAKE RELEASE LEVER:**
☒ SIDE COLUMN ☐ REMOTE MOUNT (\$) ☐ BOTH (\$)
☐ SLANT HOOD (INCLUDES FRONT/BOTTOM COVERS) (\$)
☐ FLAT HOOD (INCLUDES FRONT/BOTTOM COVERS) (\$)
☐ FRONT AND BOTTOM HEAD COVERS ONLY (\$)
☐ RIGHT HAND POWER/LEFT HAND MOTOR
☒ BT4 (BLUETOOTH ACCESS TERMINAL)
 SIDE COLUMN MOUNT: ☒ LH ☐ RH ☐ NONE-REMOTE
☒ BT44 NIGHT SWITCH
 FUNCTION: ADVISE FUNCTION

ACTIVATION OPTIONS (\$)

- ☐ PUSHBUTTON ☐ DUAL LOOP CONTROLLER
☐ PULL CORDS ☐ PRESENCE DET.
☐ MOTION DETECTOR ☐ MOTION/PRESENCE

OPTION NOTES

(\$) = PRICING CHANGE IF NOT INCLUDED IN QUOTE

PLEASE SPECIFY VOLTAGE & CONFIRM POWER SIDE
 PLEASE SPECIFY SELECTOR SWITCH FUNCTION

RYTEC CORPORATION

ONE CEDAR PARKWAY, JACKSON, WI 53037-0403

APPROVAL DRAWING

SPIRAL HZ WITH PRE-WIRED PACKAGE

FOR DOOR WIDTH UP TO 16'-0", HEIGHT UP TO 20'-11"

CUSTOMER: _____

LOCATION: _____

DATE: 12/12/24 REV: _____

DRAWING NO.: 726-01T-PREWIRED

FINAL APPROVAL SIGNATURE

FABRICATION CAN PROCEED ACCORDING TO THE
SPECIFICATION SHOWN EXCEPT AS NOTED.

APPROVED BY: _____

PRINT NAME: _____

SIGNATURE: _____

DATE: _____

-	UPDATED FOR CURRENT APPROVALS	12/12/24	JMM
REV	DESCRIPTION	DATE	BY