


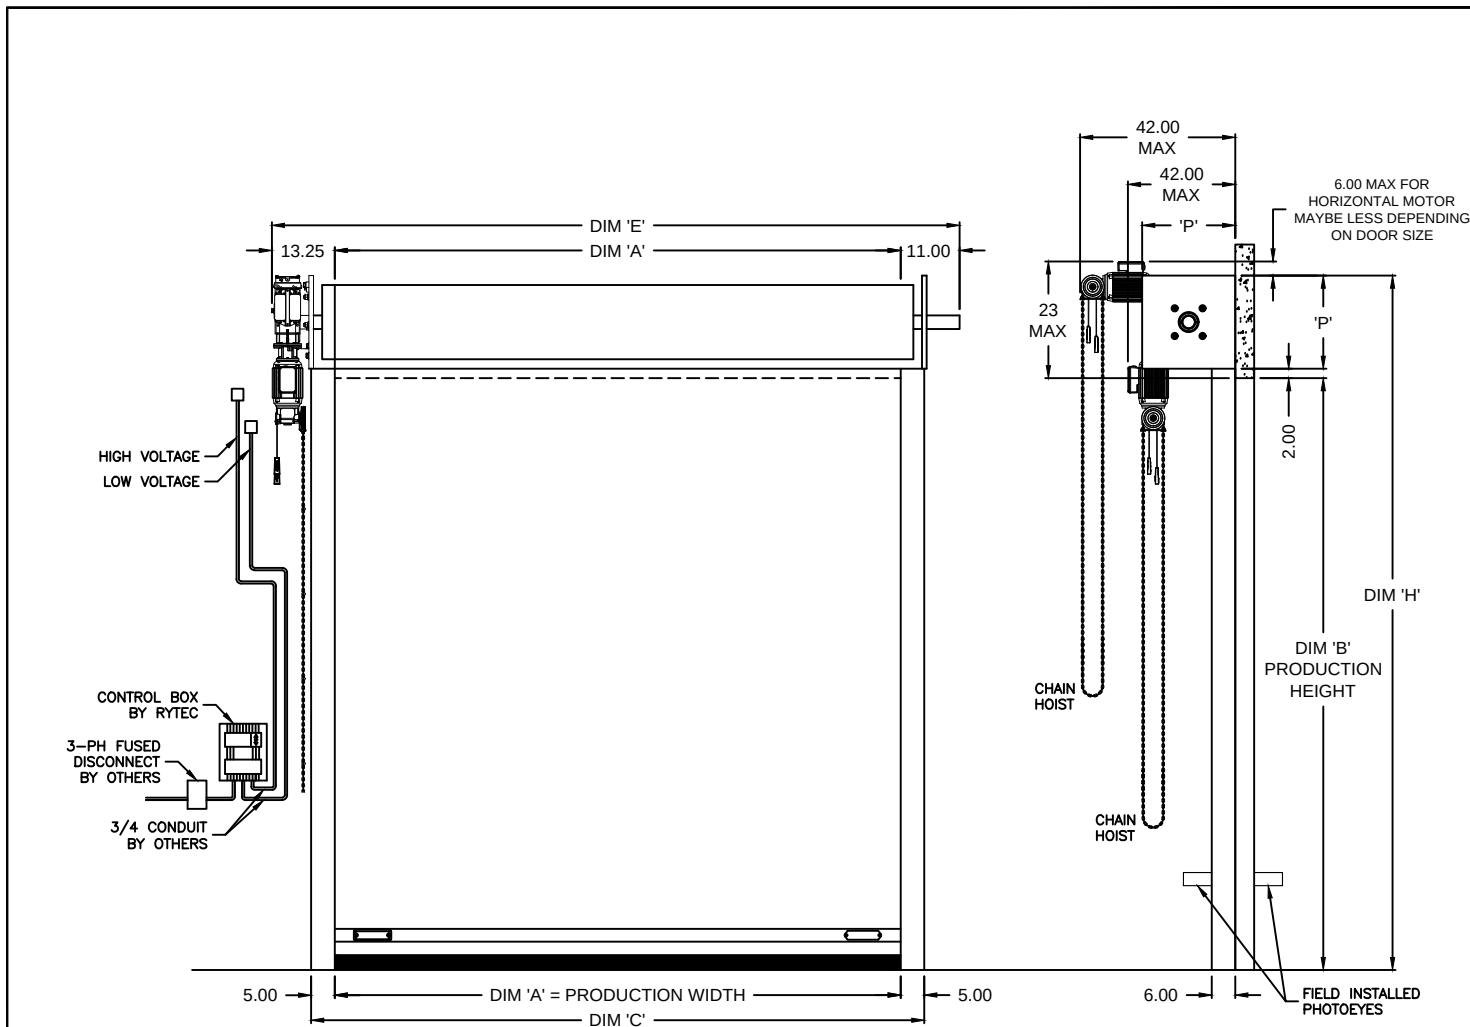

HEAD PLATE SIZING = 'P' (INCHES)	
DOOR PRODUCTION HEIGHT = 'B' (FT)	DOOR PRODUCTION WIDTH = 'A' (FT)
	8 9 10 11 12 13 14 15 16-30
8	15 (HORIZONTAL MOTOR)
9	
10	
11	
12	18 (HORIZONTAL MOTOR)
13	
14	
15	20
16	
17	
18-24	24
25-30	

FINAL APPROVAL SIGNATURE	
FABRICATION CAN PROCEED ACCORDING TO THE SPECIFICATION SHOWN EXCEPT AS NOTED	
APPROVED BY:	_____
PRINT NAME:	_____
SIGNATURE:	_____
DATE:	_____

DRAWING NOT TO SCALE, ALL DIMENSIONS IN INCHES					
DOOR NO.	A	B	C	E	H
PANEL OPTIONS					
☐ 1/4" SBR RUBBER - BLACK ☐ 1/4" EPDM RUBBER - BLUE (\$) ☐ 1/4" EPDM RUBBER - GRAY (\$)					
ELECTRICAL OPTIONS					
☐ 460v - 3ph ☐ *230v - 3ph (\$) ☐ 480v OPEN DELTA, ☐ *575v - 3ph (\$) UNGROUNDED (\$) *(INCLUDES NEMA 4 METAL ENCLOSURE WITH 575/460 OR 230/460 TRANSFORMER)					
STANDARD FEATURES					
1. WIRELESS BOTTOM BAR (NO COIL CORD) 2. SEMI-AUTOMATIC SELF REPAIRING BOTTOM BAR 3. (2) SAFETY PHOTOEYES (FIELD INSTALLED) 4. ELECTRIC REVERSING EDGE 5. CHAIN HOIST (IN CASE OF POWER FAILURE) 6. STANDARD MOTOR ORIENTATION 6.1. HORIZONTAL MOTOR IF P=15 OR P=18 6.2. VERTICAL MOTOR IF P=20 OR P=24					
UPGRADE OPTIONS					
☐ FLAT HOOD (\$) ☐ MOTOR COVER (\$) ☐ RIGHT HAND DRIVE ☐ WINDLOAD PACKAGE (\$) ☐ PATHWATCH SAFETY LIGHT SYSTEM (\$) (2) LED STRIPS, FIELD INSTALLED ☐ ROTARY DISCONNECT (NOT FUSED) (\$) ☐ BTA4 (BLUETOOTH ACCESS TERMINAL) (\$) NIGHT SWITCH FUNCTION: _____ ☐ SELECTOR SWITCH ON CONTROL BOX (\$) FUNCTION: _____					
ACTIVATION OPTIONS (\$)					
☐ — PUSHBUTTON ☐ — O/C/S STATION ☐ — MOTION DETECTOR ☐ — PRESENCE DET. ☐ — MOTION/PRESENCE			☐ DUAL LOOP CONTROLLER ☐ RADIO CONTROL RCVR (INCLUDE MIN 2 XMIT) — 1 BTN TRANSMITTER — 2 BTN TRANSMITTER — 4 BTN TRANSMITTER		
OPTION NOTES					
(\$) = PRICING CHANGE IF NOT INCLUDED IN QUOTE ***PLEASE SPECIFY VOLTAGE***					
RYTEC CORPORATION ONE CEDAR PARKWAY, JACKSON, WI 53037-0403					
APPROVAL DRAWING POWERTEC SR - SYSTEM 4					
CUSTOMER: _____					
LOCATION: _____					
DATE: _____ REV.: _____					
DRAWING NO.: 6111-00T					