


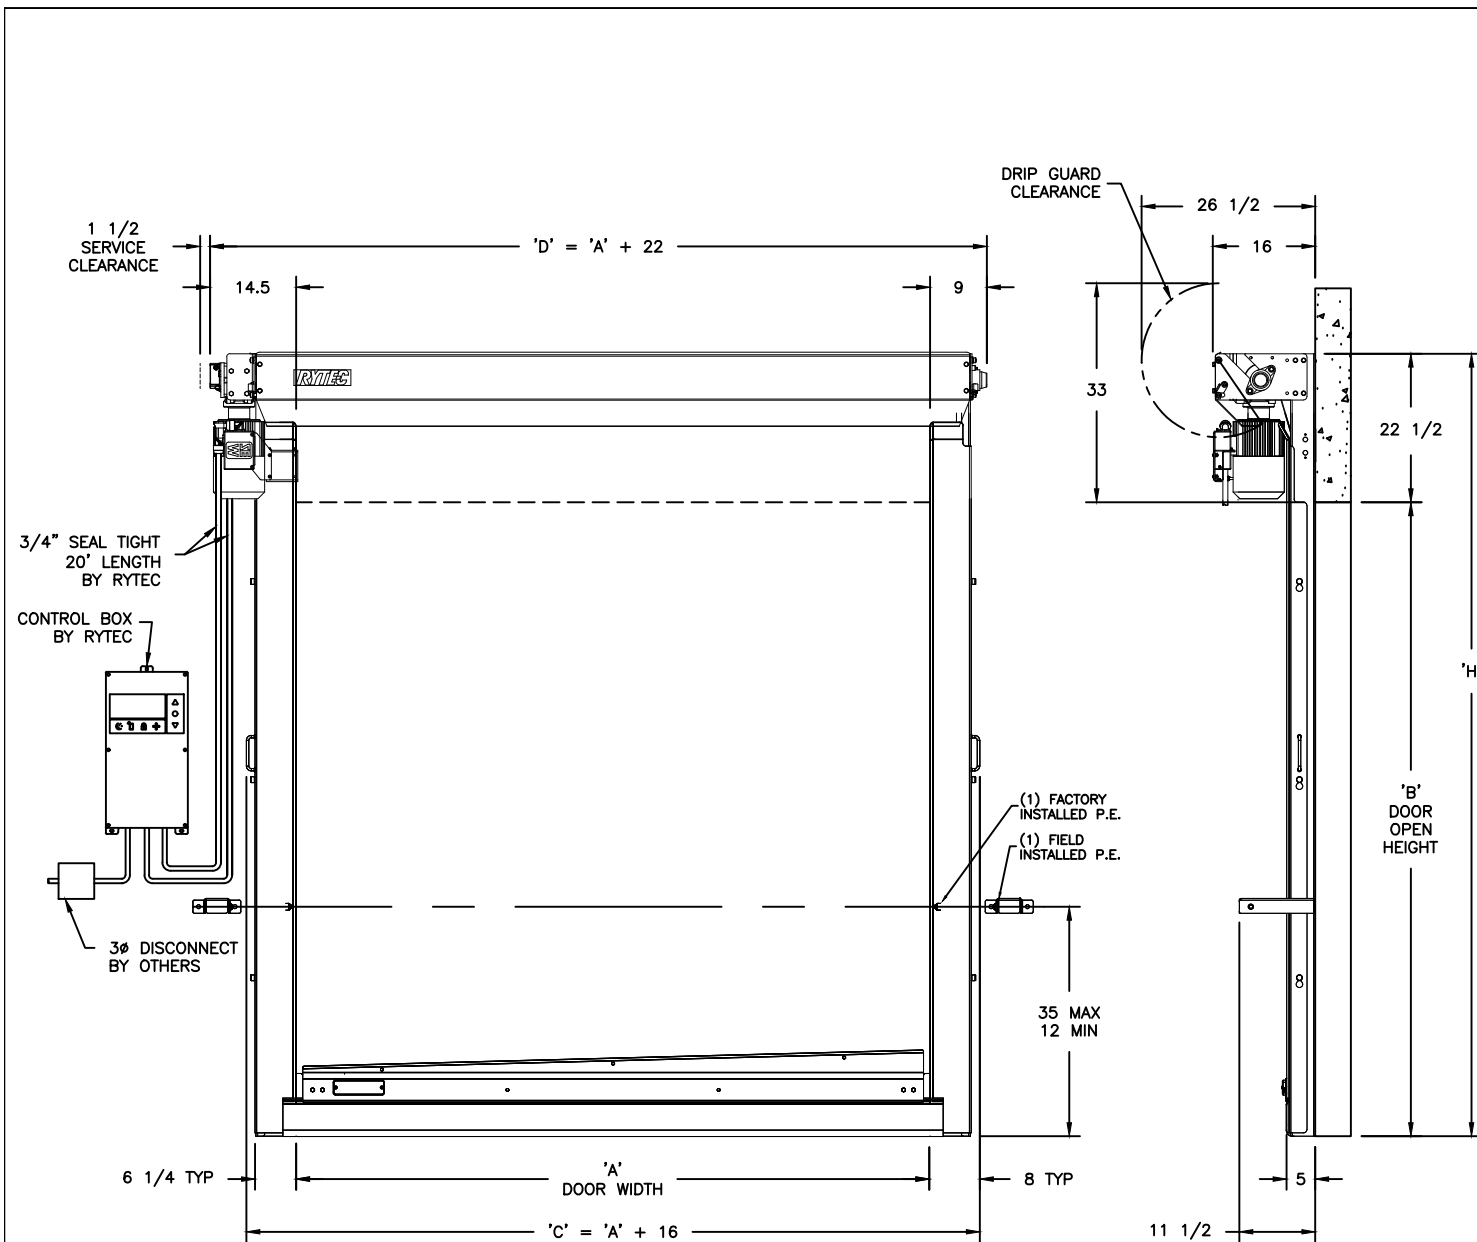

WINDRIBS (MINIMUM REQUIRED)

NO RIBS REQUIRED
IF BOTH PW AND PH ≤ 96

ONE (1) RIB REQUIRED
IF EITHER PW OR PH > 96

TWO (2) RIBS REQUIRED
IF EITHER PW OR PH > 120.

FINAL APPROVAL SIGNATURE

FABRICATION CAN PROCEED ACCORDING TO THE
SPECIFICATION SHOWN EXCEPT AS NOTED

APPROVED BY:

PRINT NAME: _____

SIGNATURE: _____

DATE: _____

DRAWING NOT TO SCALE, ALL DIMENSIONS IN INCHES

DOOR NO.	A	B	C	D	H

PANEL OPTION

USDA
☐ WHITE
☐ BLUE

ELECTRICAL OPTIONS

☐ 460v - 3ph ☐ 230v/208v - 3ph ☐ 230v - 1ph ☐ 480v OPEN DELTA, UNGROUNDED (\$)	☐ 575v - 3ph (\$) (INCLUDES NEMA 4 METAL ENCLOSURE WITH 575/460 TRANSFORMER)
---	---

STANDARD FEATURES

- (1) SET FACTORY INSTALLED PHOTOEYES
- (1) SET FIELD INSTALLED PHOTOEYES
- NEMA 4X CONTROL BOX (NON-STAINLESS)
- IP65 SEVERE DUTY MOTOR
- WIRELESS BOTTOM BAR
- REMOVABLE DRIP GUARD IN FRONT OF ROLL

UPGRADE OPTIONS

☐ SINGLE WINDRIB (\$) (SEE TABLE AT BOTTOM LEFT)

☐ DOUBLE WINDRIB (\$) (SEE TABLE AT BOTTOM LEFT)

☐ RIGHT HAND DRIVE (LH STD.)

☐ VISION PANEL (SEE TABLE AT BOTTOM LEFT)

☐ NEMA 4X STAINLESS CONTROL PANEL (\$)

☐ BTA4 (BLUETOOTH ACCESS TERMINAL) (\$)

NIGHT SWITCH FUNCTION: _____

☐ SELECTOR SWITCH ON CONTROL BOX (\$) FUNCTION: _____

ACTIVATION OPTIONS (\$)

☐ — PUSHBUTTON	☐ DUAL LOOP CONTROLLER
☐ — PULL CORDS	☐ RADIO CONTROL RCVR
☐ — MOTION DETECTOR	(INCLUDE MIN 2 XMIT)
☐ — PRESENCE DET.	— 1 BTN TRANSMITTER
☐ — MOTION/PRESENCE	— 2 BTN TRANSMITTER
	— 4 BTN TRANSMITTER

OPTION NOTES

(\$) = PRICING CHANGE IF NOT INCLUDED IN QUOTE

PLEASE SPECIFY PANEL COLOR AND VOLTAGE

ANY OPTIONS BEYOND STANDARD WILL INVALIDATE UL
SANITARY COMPLIANCE. REFER TO APPROVAL DRAWING
7C196TEMP FOR NON-UL COMPLIANT DOORS (CR5700)

RYTEC CORPORATION

ONE CEDAR PARKWAY, JACKSON, WI 53037-0403

APPROVAL DRAWING

CLEAN-ROLL® - SYSTEM 4+

CUSTOMER:

LOCATION:

DATE:

REV.: —

DRAWING NO.: 801-00T