

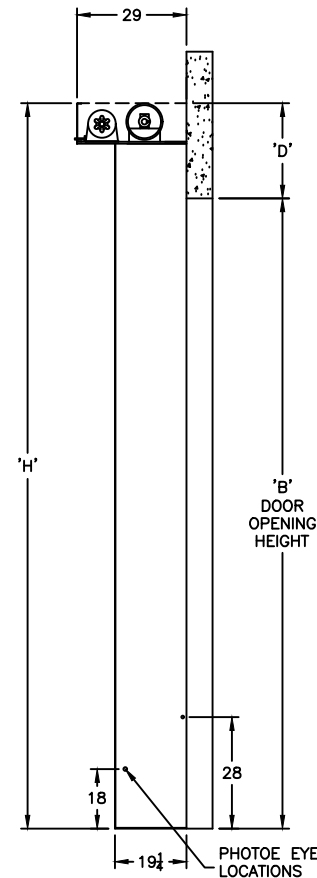


DETAIL A
MOUNTING HOLE
LOCATIONS

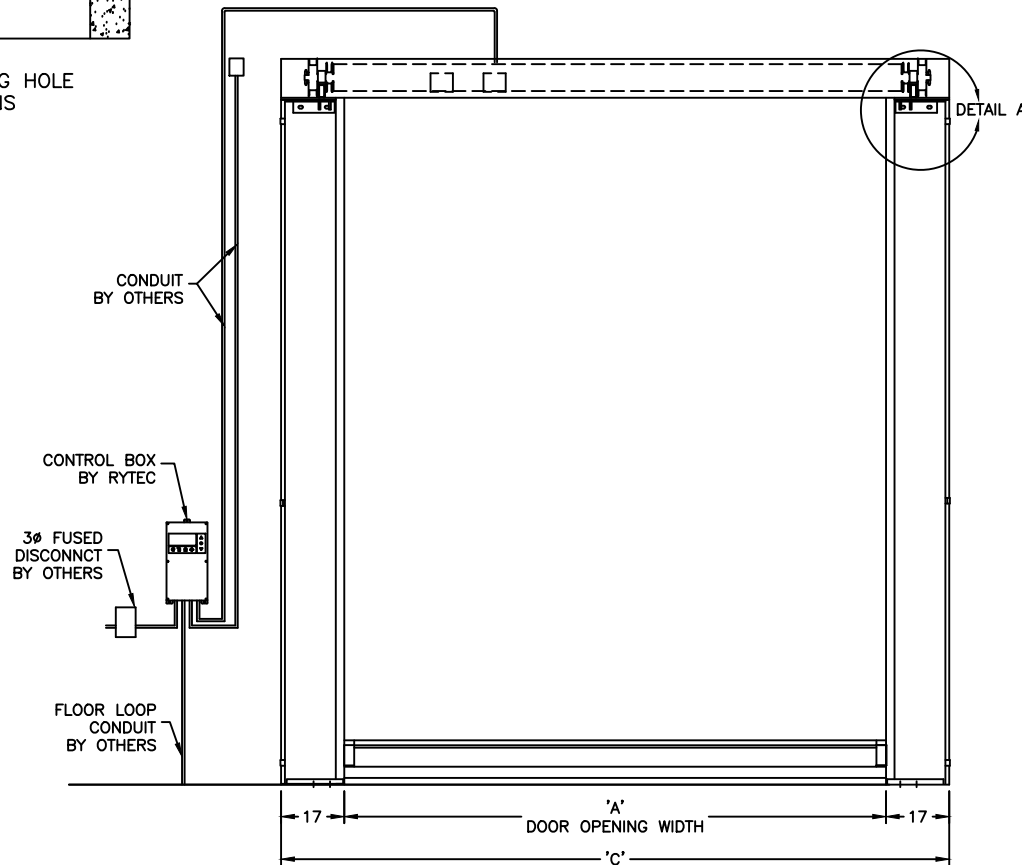

1/2 4-1/2 ANCHORS
MIN. 2-1/4 IMBEDMENT
(2) LOCATIONS PER BASE PLATE

	"D"
NO HOOD	30
FLAT HOOD	30
SLANT HOOD	35.5

DRAWING NOT TO SCALE, ALL DIMENSIONS IN INCHES					
DOOR NO.	A	B	C	D	H
				30	
PANEL OPTIONS					
3PLY (ONLY)					
☐ BLUE ☐ GRAY ☐ ORANGE ☐ BROWN					
ELECTRICAL OPTIONS					
☐ 460v - 3ph ☐ 230v/208v - 3ph ☐ 230v - 1ph ☐ 480v OPEN DELTA, UNGROUNDED (\$)			☐ 575v - 3ph (\$) (INCLUDES NEMA 4 METAL ENCLOSURE WITH 575/460 TRANSFORMER)		
STANDARD FEATURES					
1. WIRELESS BOTTOM BAR (NO COIL CORD) 2. TWO (2) SIDE COLUMN MOUNTED PHOTOEYES 3. GUIDED COUNTERWEIGHTS 4. LH MOTOR ASSEMBLY ONLY 5. ONE(1) SET PATHWATCH SAFETY SYSTEM					
UPGRADE OPTIONS (\$)					
☐ FLAT HOOD (\$) ☐ SLANT HOOD (\$) (SEE CHART) ☐ ROTARY DISCONNECT (NOT FUSED) (\$) ☐ BTA4 (BLUETOOTH ACCESS TERMINAL) (\$) NIGHT SWITCH FUNCTION: _____ ☐ SELECTOR SWITCH ON CONTROL BOX (\$) FUNCTION: _____ WINDOWS (\$): ☐ 17X17 ☐ 24X24 QTY: ☐ ONE ☐ TWO ☐ THREE ☐ FOUR REAR WINDBAR (AGAINST WALL) (\$) ☐ STRAPPED ☐ SINGLE ☐ STRAPLESS (NON-BREAKAWAY) FRONT WINDBAR (AWAY FROM WALL) (\$) ☐ STRAPPED ☐ SINGLE ☐ STRAPLESS (NON-BREAKAWAY)					
ACTIVATION OPTIONS (\$)					
☐ — PUSHBUTTON ☐ — PULL CORDS ☐ — MOTION DETECTOR ☐ — PRESENCE DET. ☐ — MOTION/PRESENCE			☐ DUAL LOOP CONTROLLER ☐ RADIO CONTROL RCVR (INCLUDE MIN 2 XMIT) — 1 BTN TRANSMITTER — 2 BTN TRANSMITTER — 4 BTN TRANSMITTER		
OPTION NOTES					
(\$) = PRICING CHANGE IF NOT INCLUDED IN QUOTE					
PLEASE SPECIFY PANEL COLOR AND VOLTAGE					
RYTEC CORPORATION ONE CEDAR PARKWAY, JACKSON, WI 53037-0403					
APPROVAL DRAWING FAST SEALØ - 17" SC SYSTEM 4+					
CUSTOMER: _____					
LOCATION: _____					
DATE: _____					REV.: _____
DRAWING NO.: 202-00T					

FINAL APPROVAL SIGNATURE	
FABRICATION CAN PROCEED ACCORDING TO THE SPECIFICATION SHOWN EXCEPT AS NOTED	
APPROVED BY: _____	
PRINT NAME: _____	
SIGNATURE: _____	
DATE: _____	