
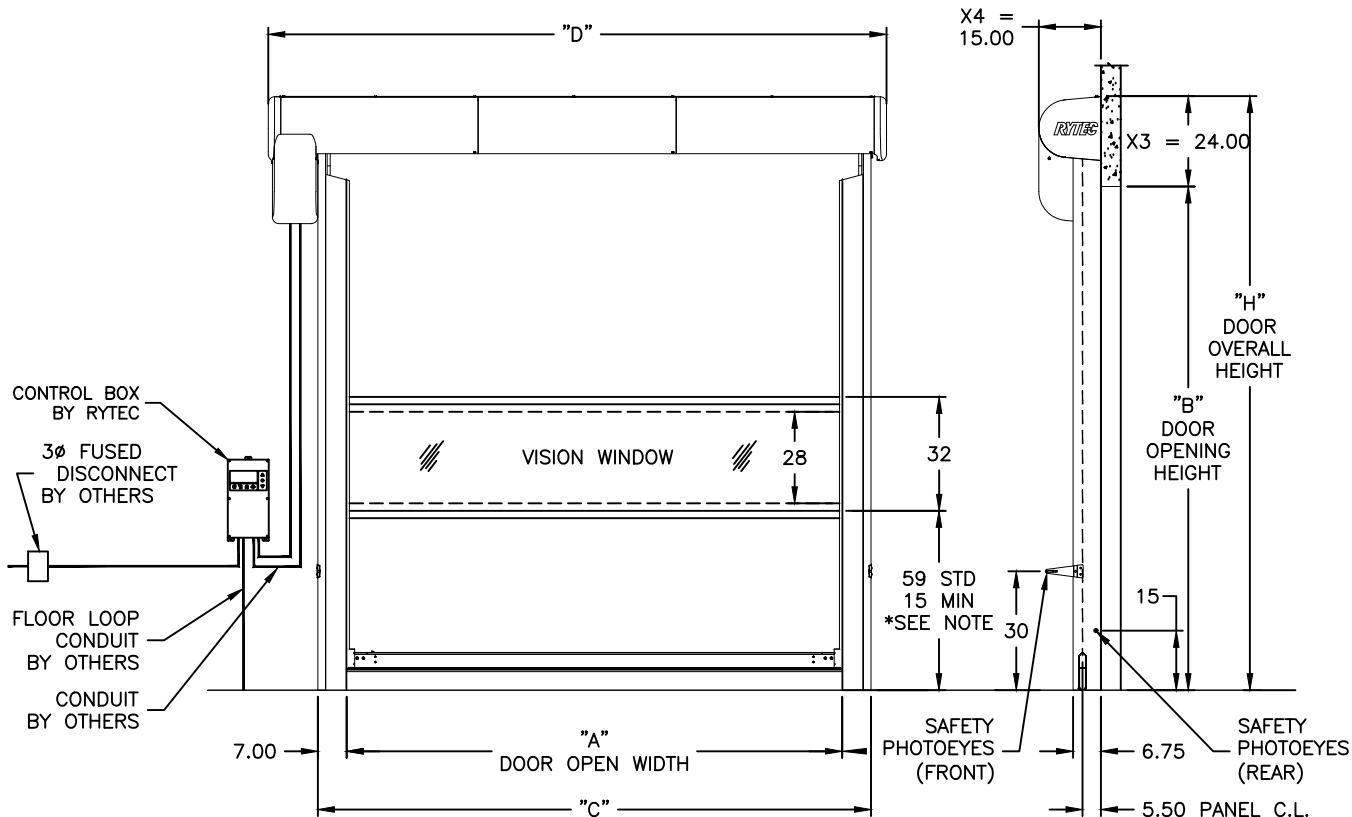


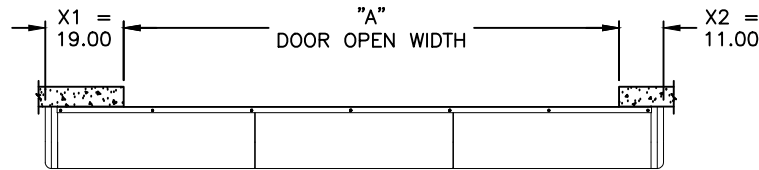

DOOR NO.	A	B	C	D	H
PANEL OPTIONS					
VINYL --(\$)	2PLY	3PLY (\$)	USDA (\$)		
☐ BLUE ☐ ORANGE ☐ WHITE	☐ BLUE ☐ ORANGE ☐ GRAY ☐ BROWN	☐ BLUE ☐ ORANGE ☐ GRAY ☐ BROWN	☐ WHITE ☐ BLUE ☐ MATTE (\$) ☐ RED		
ELECTRICAL OPTIONS					
☐ 460v - 3ph ☐ 230v/208v - 3ph ☐ 230v - 1ph ☐ 480v OPEN DELTA, UNGROUNDED (\$)			☐ 575v - 3ph (\$) (INCLUDES NEMA 4 METAL ENCLOSURE WITH 575/460 TRANSFORMER)		
STANDARD FEATURES					
1. WIRELESS SEMI-AUTOMATIC SELF REPAIRING BOTTOM BAR WITH DUAL AIR SAFETY REVERSING EDGE. 2. FRONT & REAR SAFETY PHOTOEYES. 3. FIBERGLASS COMPOSITE SIDE COLUMNS WITH REMOVEABLE FRONT COVERS. 4. STAINLESS BRACKETS & HARDWARE. 5. MOTOR CRANK & BRAKE LEVER ARE PROVIDED UNLESS COUNTERWEIGHT OPTION SELECTED. MOTOR COVER MUST BE REMOVED TO ACCESS. 6. NEMA 4X CONTROL PANEL 7. ONE (1) SET PATHWATCH SAFETY SYSTEM 8. FULL WIDTH VISION PANEL.					
UPGRADE OPTIONS					
☒ PLASTIC HOOD WITH MOTOR COVER (\$) ☐ RIGHT HAND DRIVE (LH STANDARD) ☐ COUNTERWEIGHTED MANUAL ASSIST (\$) BRAKE RELEASE: ☐ DOOR SIDE ☐ THRU-WALL(\$) ☐ BOTH (\$) ☐ STAINLESS CLAD BOTTOM BAR (\$) ☐ ROTARY DISCONNECT (NON-FUSED) (\$) ☐ BTA4 (BLUETOOTH ACCESS TERMINAL) (\$) NIGHT SWITCH FUNCTION: _____ ☒ BRUSH SEALS (BLACK) ☐ VINYL SEALS (WHITE) ☐ IP65 SEVERE DUTY MOTOR (\$) ☐ SELECTOR SWITCH ON CONTROL BOX (\$) FUNCTION: _____ ☐ TEMP < 50° REQR LOW TEMP PVC WINDRIB TYPE: ☐ ALUMINUM ☐ WHITE FIBERGLASS ☐ BLACK FIBERGLASS					
ACTIVATION OPTIONS (\$)					
☐ — PUSHBUTTON ☐ — PULL CORDS ☐ — MOTION DETECTOR ☐ — PRESENCE DET. ☐ — MOTION/PRESENCE		☐ DUAL LOOP CONTROLLER ☐ RADIO CONTROL RCVR (INCLUDE MIN 2 XMIT) — 1 BTN TRANSMITTER — 2 BTN TRANSMITTER — 4 BTN TRANSMITTER			
OPTION NOTES					
(\$) = PRICING CHANGE IF NOT INCLUDED IN QUOTE ***SPECIFY PANEL COLOR, VOLTAGE & WINDRIB TYPE***					
RYTEC CORPORATION ONE CEDAR PARKWAY, JACKSON, WI 53037-0403					
APPROVAL DRAWING PLEXLINE ^o - SYSTEM 4+					
CUSTOMER: _____					
LOCATION: _____					
DATE: _____					
DRAWING NO.: 1601-00T			REV.: —		

FINAL APPROVAL SIGNATURE	
FABRICATION CAN PROCEED ACCORDING TO THE SPECIFICATION SHOWN EXCEPT AS NOTED	
APPROVED BY:	_____
PRINT NAME:	_____
SIGNATURE:	_____
DATE:	_____

	X1	X2	X3	X4		
WITHOUT HOOD	17.50	9.50	19.00	14.50	C = A + 14.00 D = A + X1 + X2 H = B + X3	* WINDOW LOCATION LOWERED IF TOP RIB EXCEEDS DOOR HEIGHT (B). * MAINTAIN 32 INCH SPACING BETWEEN ALL RIBS.
WITH HOOD	19.00	11.00	24.00	15.00		