
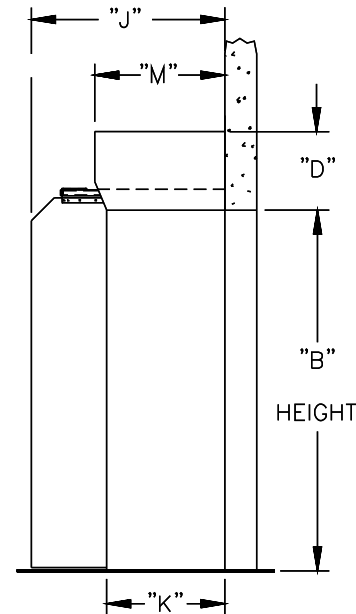
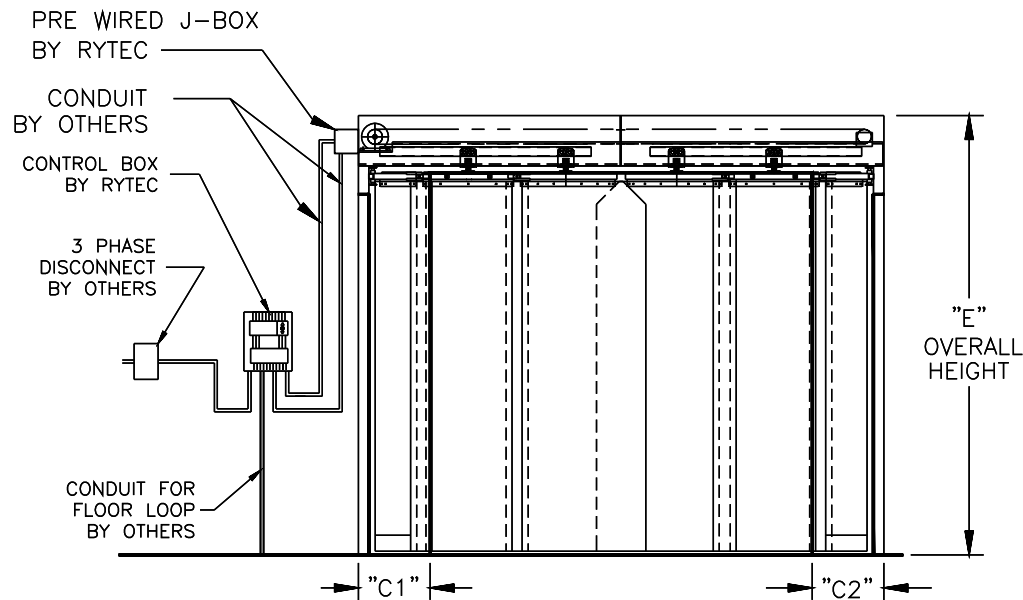


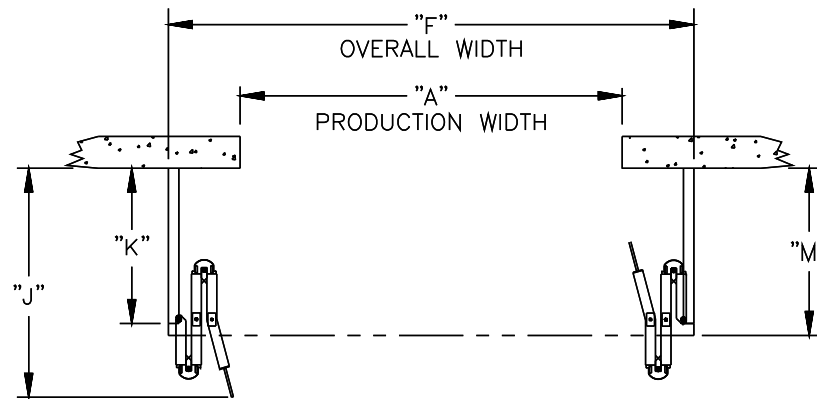

DRAWING NOT TO SCALE, ALL DIMENSIONS IN INCHES										
DOOR NO.	A	B	C1	C2	D	E	F	J	K	M
-	-	-	18	18	12	-	-	-	-	-

ELECTRICAL OPTIONS

- ☐ 460v - 3ph
☐ 230v/208v - 3ph
☐ 575v - 3ph (INCLUDES NEMA 4 METAL ENCLOSURE WITH 575/460 TRANSFORMER)

STANDARD FEATURES

1. NEMA 4X CONTROL PANEL ENCLOSURE
2. LH MOTOR ASSEMBLY ONLY
3. INSULATED SIDE PANELS WITH THERMAL BREAK.
4. VERTICALLY SEAMED 3/8" PVC PANELS

STANDARD OPTIONS

- ☐ ROTARY DISCONNECT (NOT FUSED)
☐ SELECTOR SWITCH ON CONTROL BOX
 FUNCTION: _____

ACTIVATION

- | | |
|--|---|
| ☐ — PUSHBUTTON | ☐ DUAL LOOP CONTROLLER |
| ☐ — PULL CORDS | ☐ RADIO CONTROL RCVR |
| ☐ — MOTION DETECTOR | (INCLUDE MIN 2 XMIT) |
| ☐ — PRESENCE DET. | — 1 BTN TRANSMITTER |
| ☐ — MOTION/PRESENCE | — 2 BTN TRANSMITTER |
| | — 4 BTN TRANSMITTER |

OPTION NOTES

NOTES:

PLEASE SPECIFY VOLTAGE

RYTEC CORPORATION

ONE CEDAR PARKWAY, JACKSON, WI 53037-0403

**APPROVAL DRAWING
FAST FOLD®**

APPROVAL SIGNATURE

FABRICATION CAN PROCEED ACCORDING TO THE SPECIFICATION SHOWN EXCEPT AS NOTED

APPROVED BY:

PRINT NAME: _____

SIGNATURE: _____

DATE: _____

CUSTOMER:

LOCATION:

DATE:

REV.: _____

DRAWING NO.: 401014-04T