

DETAIL A
MOUNTING HOLE LOCATIONS
TYP BOTH SIDE COLUMNS

HIGH VOLTAGE
CONDUIT
BY OTHERS


(2) 3/4-14 NPT
BOTH SIDE
COLUMNS

CONTROL BOX
BY RYTEC

3Ø DISCONNECT
BY OTHERS

FLOOR LOOP CONDUIT
BY OTHERS

LOW VOLTAGE CONDUIT
BY OTHERS

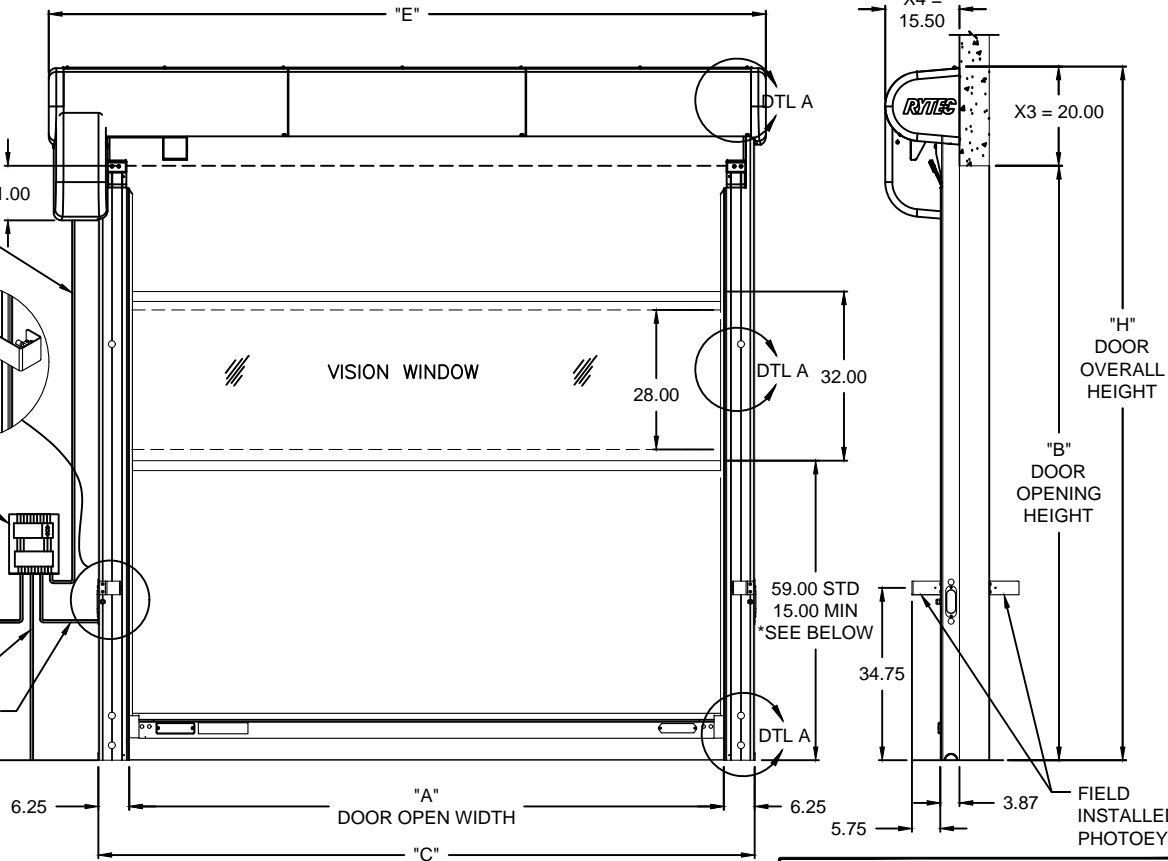

DRAWING NOT TO SCALE, ALL DIMENSIONS IN INCHES

DOOR NO.	A	B	C	E	H

PANEL OPTIONS

VINYL (-\$)	2PLY	3PLY (\$)	USDA (\$)
<input type="checkbox"/> BLUE	<input type="checkbox"/> BLUE	<input type="checkbox"/> BLUE	<input type="checkbox"/> WHITE
<input type="checkbox"/> ORANGE	<input type="checkbox"/> ORANGE	<input type="checkbox"/> ORANGE	<input type="checkbox"/> BLUE
<input type="checkbox"/> WHITE	<input type="checkbox"/> GRAY	<input type="checkbox"/> GRAY	<input type="checkbox"/> MATTE (\$)
	<input type="checkbox"/> BROWN	<input type="checkbox"/> BROWN	<input type="checkbox"/> RED

ELECTRICAL OPTIONS

<input type="checkbox"/> 460v - 3ph	<input type="checkbox"/> 575v - 3ph (\$)
<input type="checkbox"/> 230v/208v - 3ph	(INCLUDES NEMA 4 METAL ENCLOSURE WITH 575/460 TRANSFORMER)
<input type="checkbox"/> 230v - 1ph	
<input type="checkbox"/> 480v OPEN DELTA, UNGROUNDED (\$)	

STANDARD FEATURES

1. WIRELESS BOTTOM BAR (NO COIL CORD)
2. SEMI-AUTOMATIC SELF REPAIRING BOTTOM BAR
3. (2) SAFETY PHOTOEYES (FIELD INSTALLED)
4. (2) SETS PATHWATCH SAFETY SYSTEM.
5. DUAL AIR REVERSING EDGE
6. CLEAR VISION WINDOW, FULL WIDTH

UPGRADE OPTIONS

- ALUMINUM HOOD (\$)
- PLASTIC HOOD AND MOTOR COVER (\$)
- RIGHT HAND DRIVE (LH STD.)
- ROTARY DISCONNECT (NON-FUSED) (\$)
- BTA4 (BLUETOOTH ACCESS TERMINAL) (\$)
- NIGHT SWITCH FUNCTION: _____
- SELECTOR SWITCH ON CONTROL BOX (\$)
- FUNCTION: _____
- TEMP < 50° REQR LOW TEMP PVC
- WINDRIB TYPE: ALUMINUM
- WHITE FIBERGLASS BLACK FIBERGLASS

ACTIVATION OPTIONS (\$)

<input type="checkbox"/> — PUSHBUTTON	<input type="checkbox"/> DUAL LOOP CONTROLLER
<input type="checkbox"/> — PULL CORDS	<input type="checkbox"/> RADIO CONTROL RCVR (INCLUDE MIN 2 XMIT)
<input type="checkbox"/> — MOTION DETECTOR	— 1 BTN TRANSMITTER
<input type="checkbox"/> — PRESENCE DET.	— 2 BTN TRANSMITTER
<input type="checkbox"/> — MOTION/PRESENCE	— 4 BTN TRANSMITTER

OPTION NOTES

(\$) = PRICING CHANGE IF NOT INCLUDED IN QUOTE
 PLEASE SPECIFY VOLTAGE & PANEL COLOR

RYTEC CORPORATION
 ONE CEDAR PARKWAY, JACKSON, WI 53037-0403

APPROVAL DRAWING
 PREDADOOR NXT® - SYSTEM 4

FINAL APPROVAL SIGNATURE

FABRICATION CAN PROCEED ACCORDING TO THE SPECIFICATION SHOWN EXCEPT AS NOTED

APPROVED BY: _____

PRINT NAME: _____

SIGNATURE: _____

DATE: _____

	X1	X2	X3	X4
WITHOUT HOOD	15.00	7.00	17.13	12.00
ALUMINUM HOOD	16.00	8.00	20.13	17.50
PLASTIC HOOD	16.25	8.50	20.00	15.50

C = A + 12.50
 E = A + X1 + X2
 H = B + X3

* WINDOW LOCATION LOWERED IF TOP RIB EXCEEDS DOOR OPENING HEIGHT (B).
 * MAINTAIN 32 INCH SPACING BETWEEN ALL RIBS.

CUSTOMER:	
LOCATION:	
DATE:	
REV.:	
DRAWING NO.:	401064-01T